



A Beautiful VIEW from SKY Aluminium WINDOWS & DOORS

INDEX

Series	Type Page	Nos.	
D	Sliding Windows	8 to 11	
Slim	Sliding Windows	14 to 23	
Elegance	Sliding Windows	26 to 35	
Elegance Plus	Sliding Windows	38 to 43	
Luxury	Sliding Windows	46 to 55	
Luxury	Corner Windows	58 to 61	
Luxury Optima	Sliding Windows	64 to 67	
	Ventilators	70 to 73	
Sophistica	Sliding & Folding Windows	76 to 79	
Spectra	Vertical Slide	80 to 81	
Pixel	Tilt & Turn	82 to 83	
Urban	Top Hung & Casement Windows	84 to 85	
Vogue	Top Hung & Casement Windows	86 to 89	
Glazed	Fixed Windows	90 to 91	
Urban	Doors	94 to 95	
Vogue	Doors	96 to 99	
Vogue Plus	Doors	100 to 101	
	Doors	102 to 103	
Finesse Plus	Doors	104 to 107	

ABOUT US

is where High Technology and State of the Art Designs, Meticulous craftsmanship meets innovation to transform your living spaces.


Our precisely fabricated Aluminium Doors and Windows symbolize a culmination of modern design seamlessly blending with aesthetics and very high exceptional functionality.

With over a decade's experience providing end to end solution while offering Builders and Architects with State of the Art Designs, Customized Hardware Solutions and seamless Installation so that our customers always assured of Very High Premium Quality and On Time Delivery.

Our wide range of products and services include Sliding Windows & Doors, Vertical Sliding Windows, Casement Windows, Doors with Automatic / Manual Honeycomb , Doors with Automatic / Manual Venetions, Doors with moveable Aluminium louvers , Ventilators, Sliding Folding Doors, Slim Doors , Office Partitions , Shower Cubicals , Synchronized Telescopic Sliders,


products today are catering to a wide range of applications from High Rise Apartments to Residential Buildings to Luxury Villas to Office spaces to luxury Apartments to Public utility spaces.

Windows are designed with the basic thought process of "BEAUTY IN SIMPLICITY"

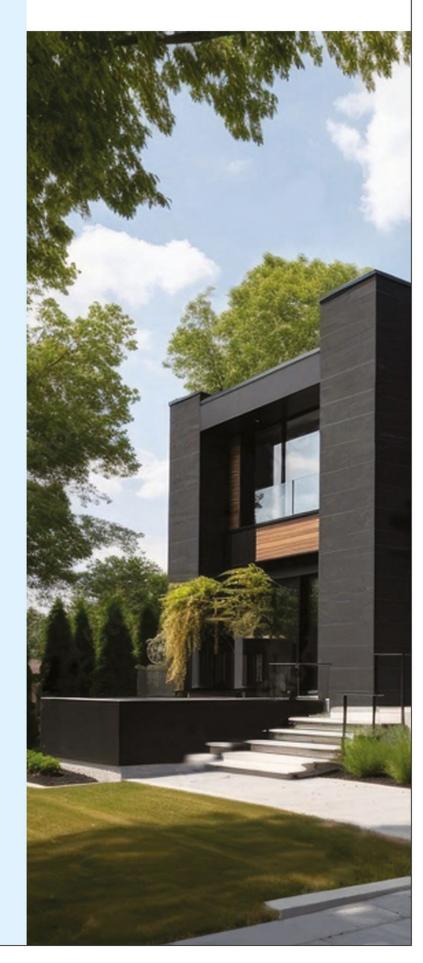





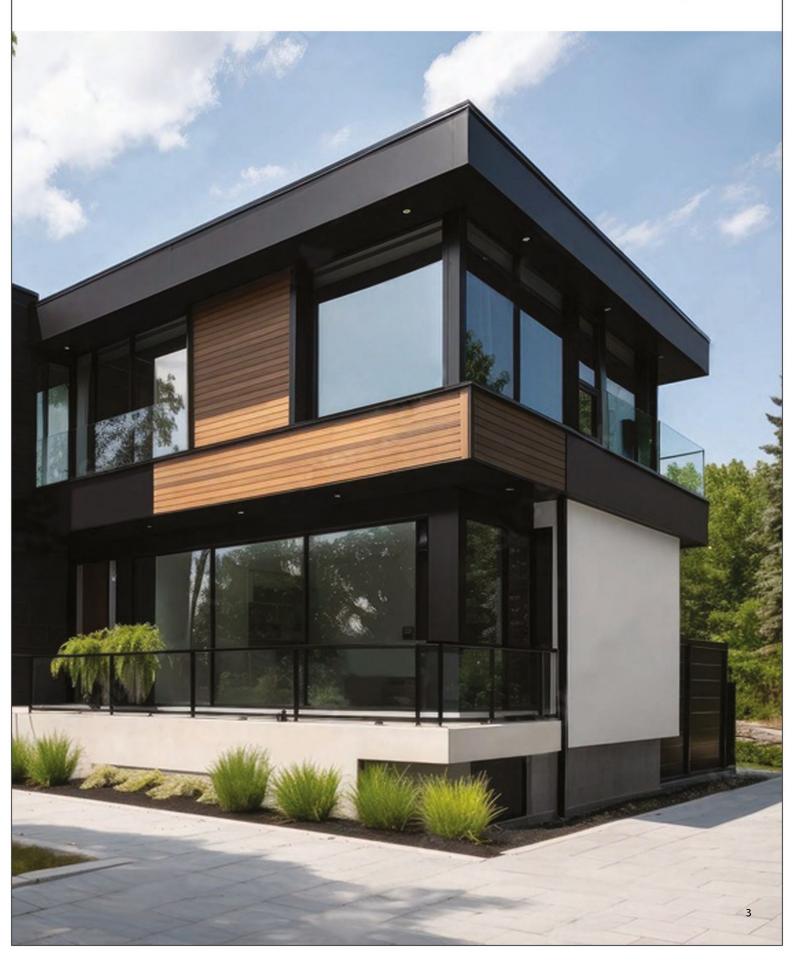

BENEFITS



Sound Insulation

Sky Windows are designed to keep out extremely loud noises thereby enhancing the sound insulation levels



Water Tightness

Sky Windows are specially designed drainage solutions to keep out heavy rains



Recyclable

Sky Windows are environmentally sustainable / recyclable



Wind Load

Sky windows are designed with Hurricane bar to take care of enhanced wind loads



Air Permeability

Sky Windows are designed for Quality Gaskets, High performance Glass for enhanced air permeability



Impact Resistance

Sky Windows are designed for high impacts because of the quality of the Aluminium alloy and high performance glass









In order to meet the needs of every modern home, we provide a wide range of windows from Sliding Doors to Casement windows to Sliding Folding windows, you can choose from to fit your homes, décor and styling. Windows play a very important part in weather proofing and insulating your home. It is one of the best investments you can make for your home to improve your homes Aesthetics, Energy Efficiency.

INDEX











D SERIES SLIDING WINDOWS

KEY FEATURES FOR D SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- Silicon coated wool pile for smooth movement of the windows and better sound insulation
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Single point Locking / Anti lift / Anti Theft plugs , High Quality Safety Glasses are used for enhanced safety
- Sleekly designed windows with minimal obstruction / minimal sightlines
- Unlimited colors with superior finish with options of Powder Coating, Wood Coating and Anodizing

TECHNICAL SPECIFICATION:-

Track Option:

- 2 Track D2
- 21/2 Track D21/2
- 3 Track D3
- 31/2 Track D31/2

Track	Track	Track	Model
Option	Width mm	Height mm	No.
2	50	34	D2
21/2	60	34	D21/2
3	80	34	D3
31/2	80	34	D31/2

Sash Height : 2100 mm (max.)
Sash Width : 1200 mm (max.)

Sight Line : 55 mm

Locking Options: Single Point LockingGlass Options: Single Glass 5 To 6 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS Retractable Pleated

FINISHES

A. Powder Coating : Satin


Glossy Semi Glossy Matt Texture PVDF


B. Wood CoatingC. Anodizing

FEATURES:


Combination Windows : AvailableAnti Lift System : Available


D SERIES D2

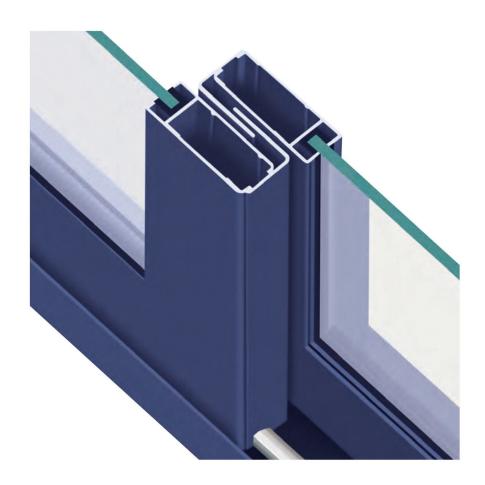

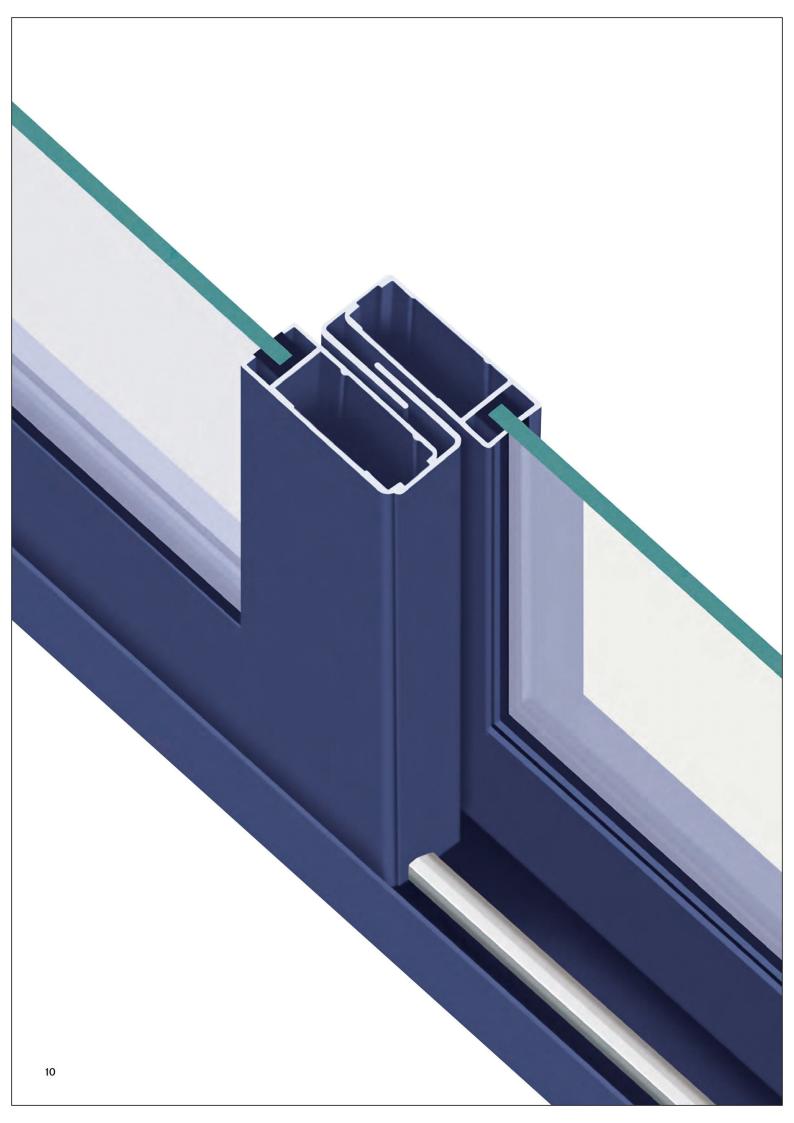


D SERIES D2

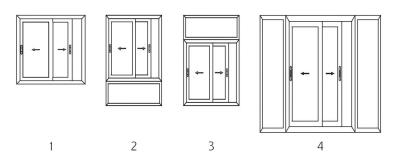



SLIDING WINDOW 2 TRACK 50mm

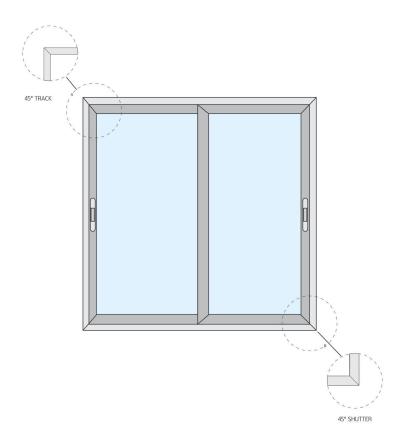

TECHNICAL SPECIFICATION:-

Track Option:

• 2 Track - D2

• 21/2 Track - D21/2

• 3 Track - D3

• 3½ Track - D3½

Track	Track	Track	Model
Option	Width mm	Height mm	No.
2	50	34	D2
21/2	60	34	D21/2
3	80	34	D3
31/2	80	34	D31/2

 Sash Height
 : 2100 mm (max.)

 Sash Width
 : 1200 mm (max.)

 Sight Line
 : 55 mm

Locking Options: Single Point LockingGlass Options: Single Glass 5 To 6 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS Retractable Pleated

FINISHES

A. Powder Coating

: Satin Glossy Semi Glossy Matt Texture PVDF


B. Wood Coating

C. Anodizing

FEATURES:

Combination Windows : AvailableAnti Lift System : Available



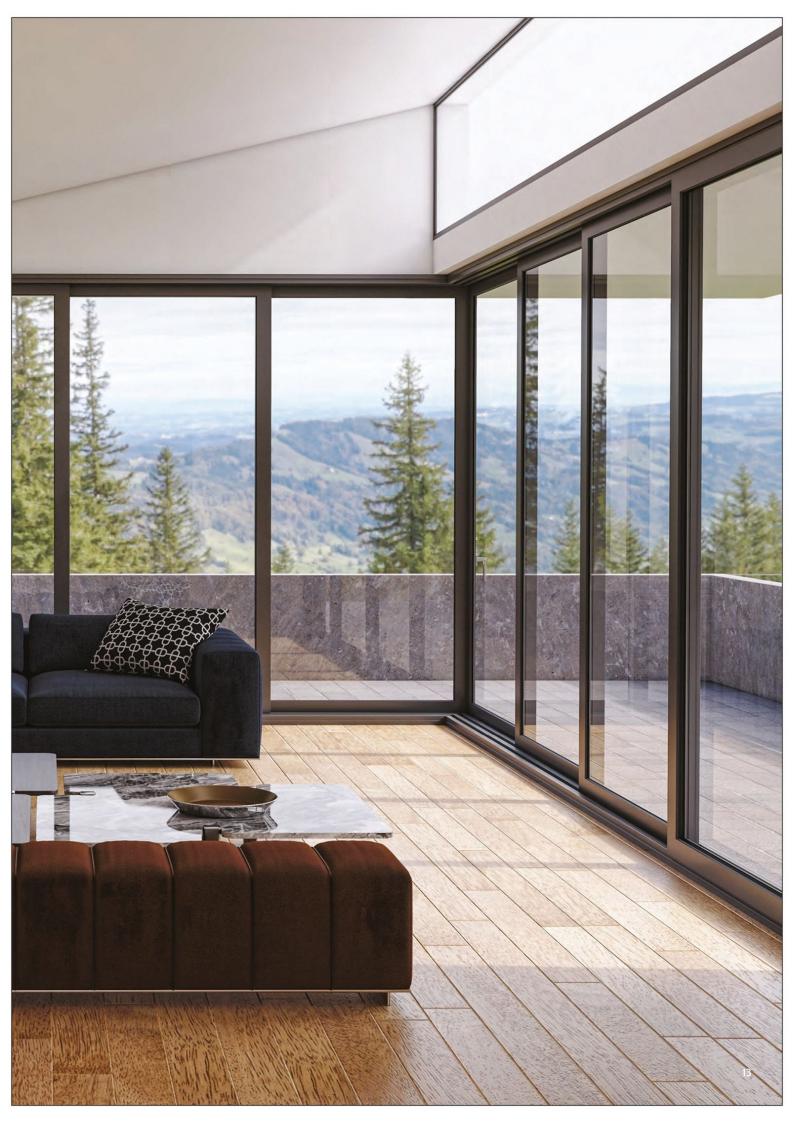





SLIM SERIES SLIDING WINDOWS

KEY FEATURES FOR SLIM SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- There are 2 options of Lock handle bar Option 1 Normal Lock Handle Bar,
 Option 2 Projected Lock Handle Bar wherein customer can select the type of
 Lock handle bar required during ordering.
- Hurricane Bar an additional re-enforcement is provided on the sliding door for higher wind resistance.
- Silicon coated wool pile for smooth movement of the windows and better sound insulation
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Single point Locking / Anti lift / Anti Theft plugs , High Quality Safety Glasses are used for enhanced safety
- Sleekly designed windows with minimal obstruction / minimal sightlines

TECHNICAL SPECIFICATION:

Track Option:

- 2 Track S2
- 21/2 Track S21/2
- 3 Track SW3
- 3½ Track S3½

Track	Track	Track	Model
Option	Width mm	Height mm	No.
2	50	34	S2
21/2	60	34	S21/2
3	80	34	SW3
31/2	80	34	S31/2

 Sash Height
 : 2100 mm (max.)

 Sash Width
 : 900 mm (max.)

 Sight Line
 : 20 mm

Locking Options : Single Point Locking
Glass Options : Single Glass 5 To 6 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS Retractable Pleated

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood CoatingC. Anodizing

FEATURES:

Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available


SLIM SERIES S2




SLIM SERIES S21/2



SLIM SERIES SW3




SLIM SERIES S31/2






SLIM SERIES S2

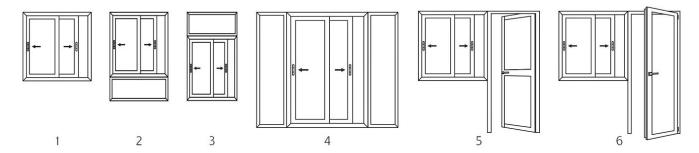

SLIDING WINDOW 2 TRACK - 50mm

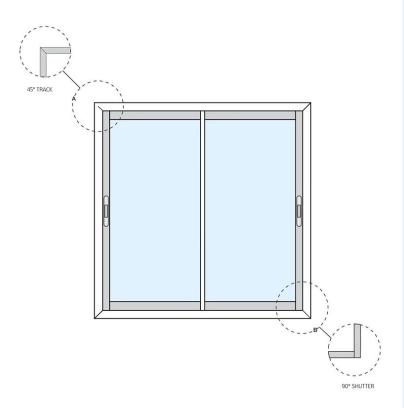

Option 2 : Lock Handle Bar Projected

TECHNICAL SPECIFICATION:-

Track Option:

• 2 Track - S2

Track	Track	Track	Model
Option	Width mm	Height mm	No.
2	50	34	S2
C	:L.c	2100 (

 Sash Height
 : 2100 mm (max.)

 Sash Width
 : 900 mm (max.)

 Sight Line
 : 20 mm

Locking Options: Single Point LockingGlass Options: Single Glass 5 To 6 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS Retractable Pleated

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating


C. Anodizing

FEATURES:


Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available



SLIM SERIES S21/2

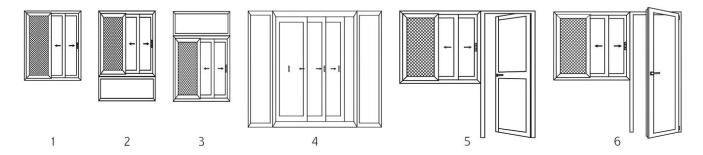

SLIDING WINDOW 21/2 TRACK - 60mm

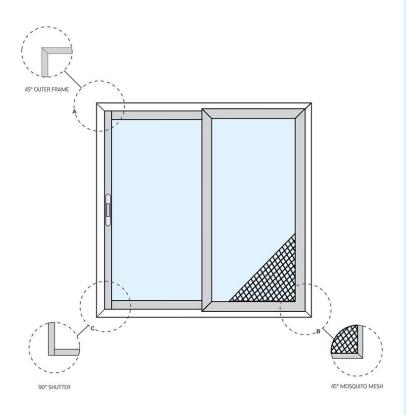

Option 2 : Lock Handle Bar Projected

TECHNICAL SPECIFICATION:

Track Option:

• 2 Track - S21/2

Track	Track	Track	Model
Option	Width mm	Height mm	No.
21/2	60	34	S21/2

 Sash Height
 : 2100 mm (max.)

 Sash Width
 : 900 mm (max.)

 Sight Line
 : 20 mm

Locking Options: Single Point LockingGlass Options: Single Glass 5 To 6 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS Retractable Pleated

FINISHES

A. Powder Coating : Satin


Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating


C. Anodizing

FEATURES:


Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available

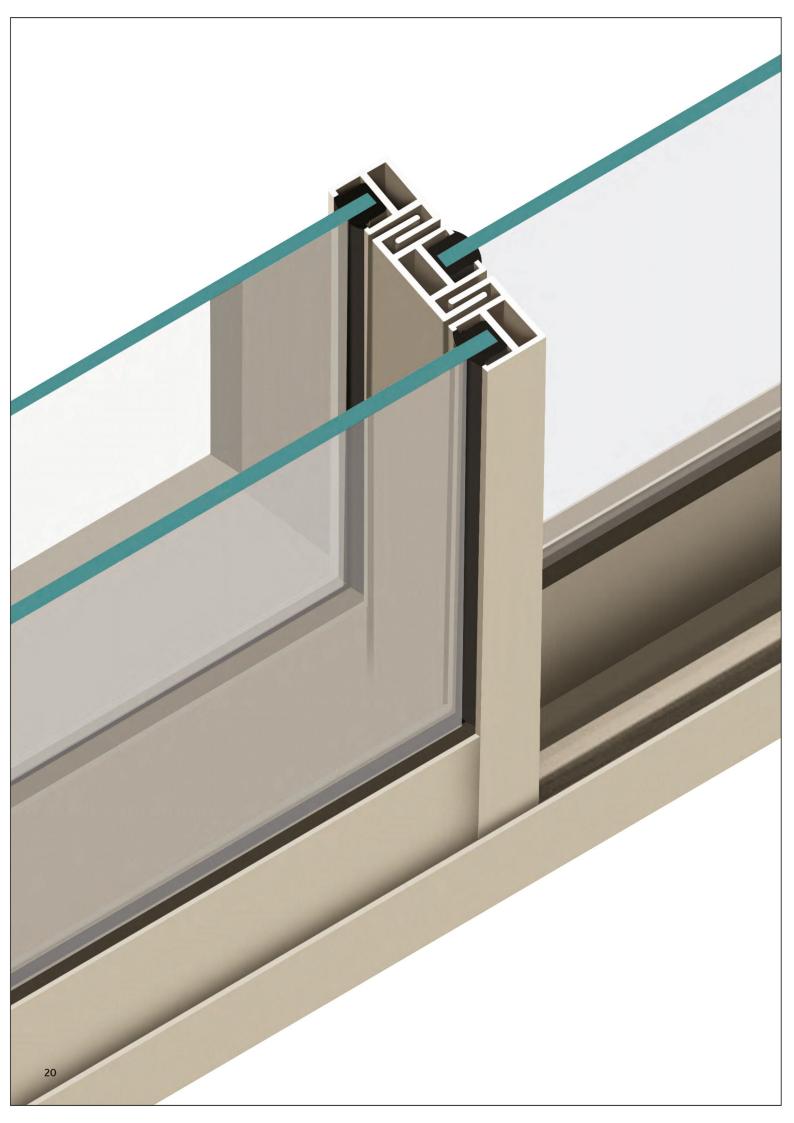

SLIM SERIES SW3

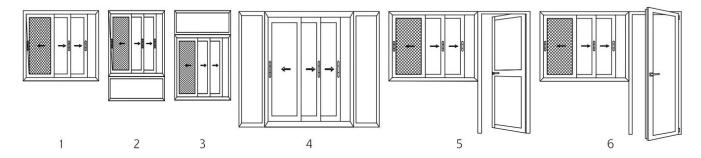

SLIDING WINDOW 3 TRACK 80mm

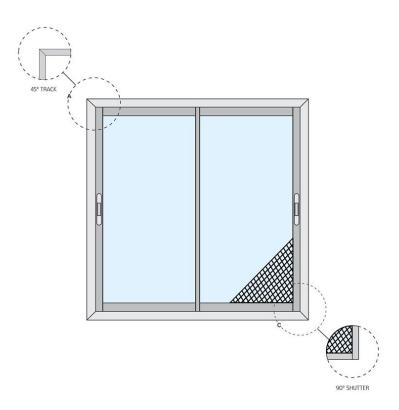

Option 2 : Lock Handle Bar Projected

TECHNICAL SPECIFICATION:-

Track Option:

• 3 Track - SW3

Track	Track	Track	Model
Option	Width mm	Height mm	No.
3	80	34	SW3

 Sash Height
 : 2100 mm (max.)

 Sash Width
 : 900 mm (max.)

 Sight Line
 : 20 mm

Locking Options: Single Point LockingGlass Options: Single Glass 5 To 6 mm

Mosquito Mesh : Fiber

Coted Tear Resistant SS Retractable Pleated

FINISHES

A. Powder Coating : Satin


Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating


C. Anodizing

FEATURES:


Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available

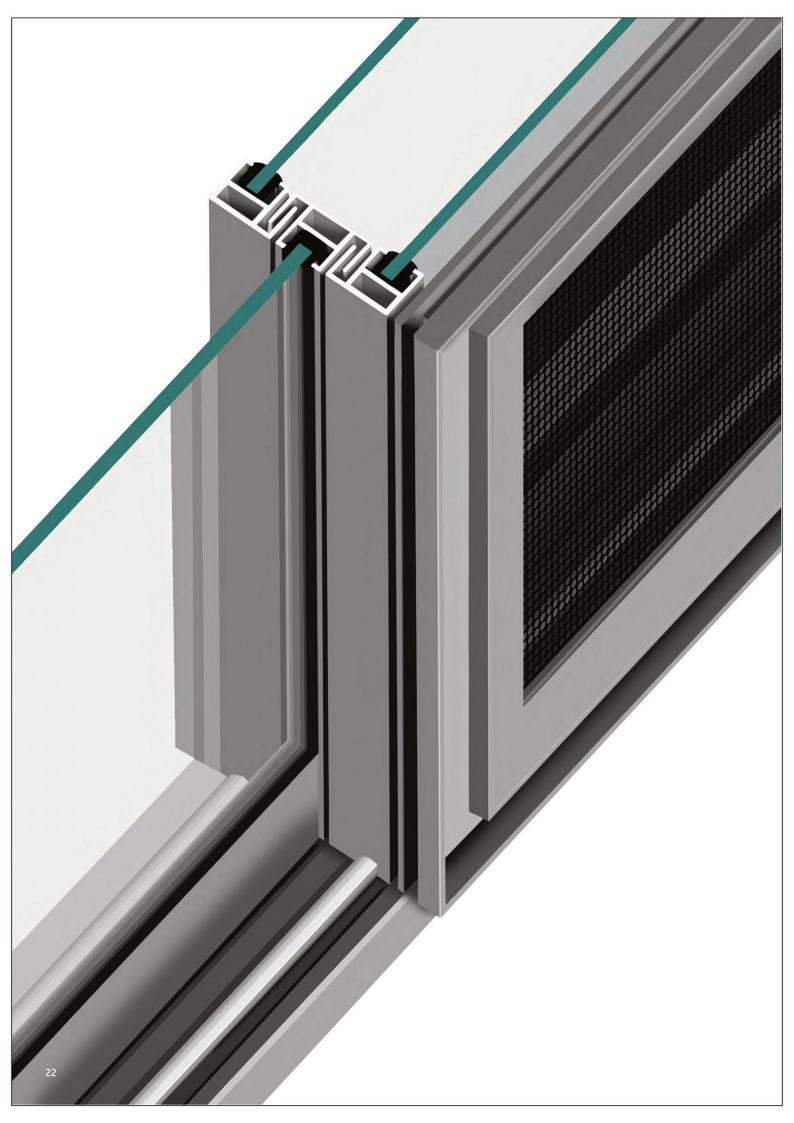

SLIM SERIES S31/2

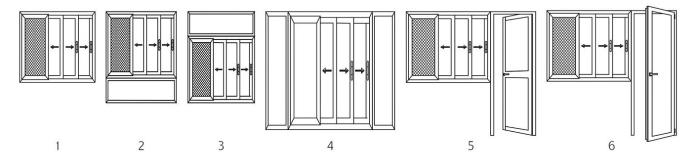

SLIDING WINDOW 31/2 TRACK - 80mm

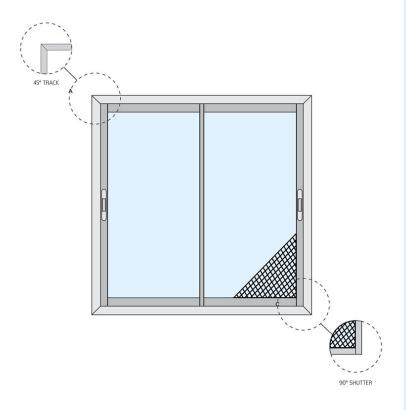

Option 2 : Lock Handle Bar Projected

TECHNICAL SPECIFICATION:-

Track Option:

• 3½ Track - S3½

Track	Track	Track	Model
Option	Width mm	Height mm	No.
31/2	80	34	S31/2

 Sash Height
 : 2100 mm (max.)

 Sash Width
 : 900 mm (max.)

 Sight Line
 : 20 mm

Locking Options: Single Point LockingGlass Options: Single Glass 5 To 6 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS Retractable Pleated

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating

C. Anodizing

FEATURES:

Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available









ELEGANCE SERIES SLIDING WINDOWS

KEY FEATURES FOR ELEGANCE SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air , Water Resistance and longer life with
- There are 2 options of Lock handle bar Option 1 Normal Lock Handle Bar, Option 2 - Projected Lock Handle Bar wherein customer can select the type of Lock handle bar required during ordering.
- Hurricane Bar an additional re-enforcement is provided on the sliding door for higher wind resistance.
- Extruded powder coated drain covers to reduce inflow of water and insect
- Silicon coated wool pile for smooth movement of the windows and better
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Multi point Locking / Anti lift / Anti Theft plugs , High Quality Safety Glasses are used for enhanced safety
- Sleekly designed windows with minimal obstruction / minimal sightlines

TECHNICAL SPECIFICATION:-

Track Option:

- 2 Track E2
- 21/2 Track E21/2
- 3 Track EW21/2
- 31/2 Track E3

Track Option	Track Width mm	Track Height mm	Model No.
2	64	47	E2
21/2	68	47	E21/2
21/2	84	47	EW21/2
3	101	47	E3
Sash Height		: 2440 mm (max.)	
Sash W	idth	: 1200 mm	(max.)
Sight Line		: 23 mm	
Locking Options		: Single Point Locking Multi Point Locking	
Glass Options		: Single Glas	ss 5 To 12 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS

Laminated Glass 11.52 to 18 mm

SS 304 Security Retractable Pleated

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture **PVDF**

B. Wood Coating

C. Anodizing

FEATURES:

• Combination Windows : Available Anti Lift System : Available Hurricane Bar for : Available Interlock profile **Hidden Bottom** : Available Center Opening : Available

Integrated Balcony Railings : Available

With laminated glass

• 1 Fixed + 1 Sliding Option : Available

ELEGANCE SERIES E2




ELEGANCE SERIES E21/2



ELEGANCE SERIES EW21/2





ELEGANCE SERIES E3






ELEGANCE SERIES E2

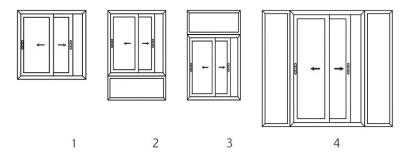



SLIDING WINDOW 2 TRACK - 64 mm

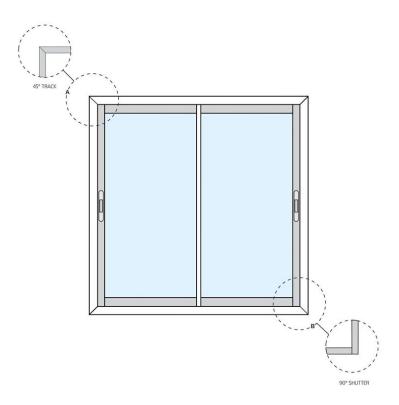

LOCK HANDLE OPTIONS: Option 1 : Lock Handle Bar Normal Option 2 : Lock Handle Bar Projected

TECHNICAL SPECIFICATION:-

Track Option:

• 2 Track - E2

Track Option	Track Width mm 64	Track Height mm 47	Model No. E2
Sash Height		: 2440 mm (max.)	
Sash Width		: 1200 mm (max.)	
Sight Line		: 23 mm	
Locking Options		: Single Poir	nt Lockin

Multi Point Locking
Glass Options : Single Glass 5 To 12 mm

Laminated Glass 11.52 to 18 mm

Mosquito Mesh : Fiber
Coated Tear Resistant SS
SS 304 Security

SS 304 Security Retractable Pleated

FINISHES

A. Powder Coating : Satin Glossy

Semi Glossy Matt Texture PVDF

B. Wood CoatingC. Anodizing

FEATURES:


Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available
 Interlock profile
 Center Opening : Available

Integrated Balcony Railings : Available
 With laminated glass


1 Fixed + 1 Sliding Option : Available
 2 Track 4 Shutters : Available



ELEGANCE SERIES E21/2

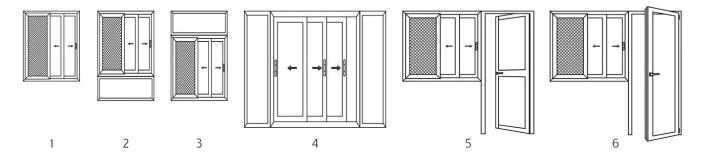

SLIDING WINDOW 21/2 TRACK - 68 mm

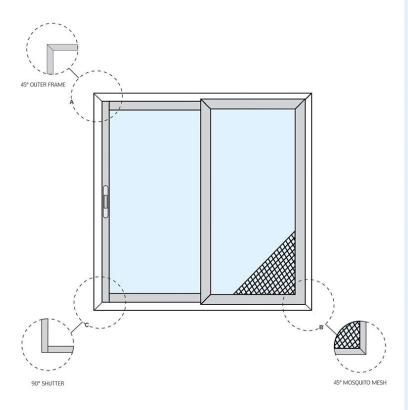

Option 2 : Lock Handle Bar Projected

TECHNICAL SPECIFICATION:

Track Option:

• 21/2 Track - E21/2

Track Option 2½	Track Width mm 68	Track Height mm	Model No. E2½	
Sash He	eight	: 2440 mm	(max.)	
Sash W	idth	: 1200 mm	(max.)	
Sight Line		: 23 mm		
Locking Options		: Single Point Locking Multi Point Locking		
Glass Options		: Single Glass 5 to 12 mm Laminated Glass 11.52 to 18 mm		
Mosqui	to Mesh	: Fiber Coated Tear Resistant SS SS 304 Security Retractable Pleated		
	•			

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating


C. Anodizing

FEATURES:


Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available
 Interlock profile

Center Opening : Available
 Integrated Balcony Railings : Available
 With laminated glass


1 Fixed + 1 Sliding Option : Available
 2 Track 4 Shutters : Available

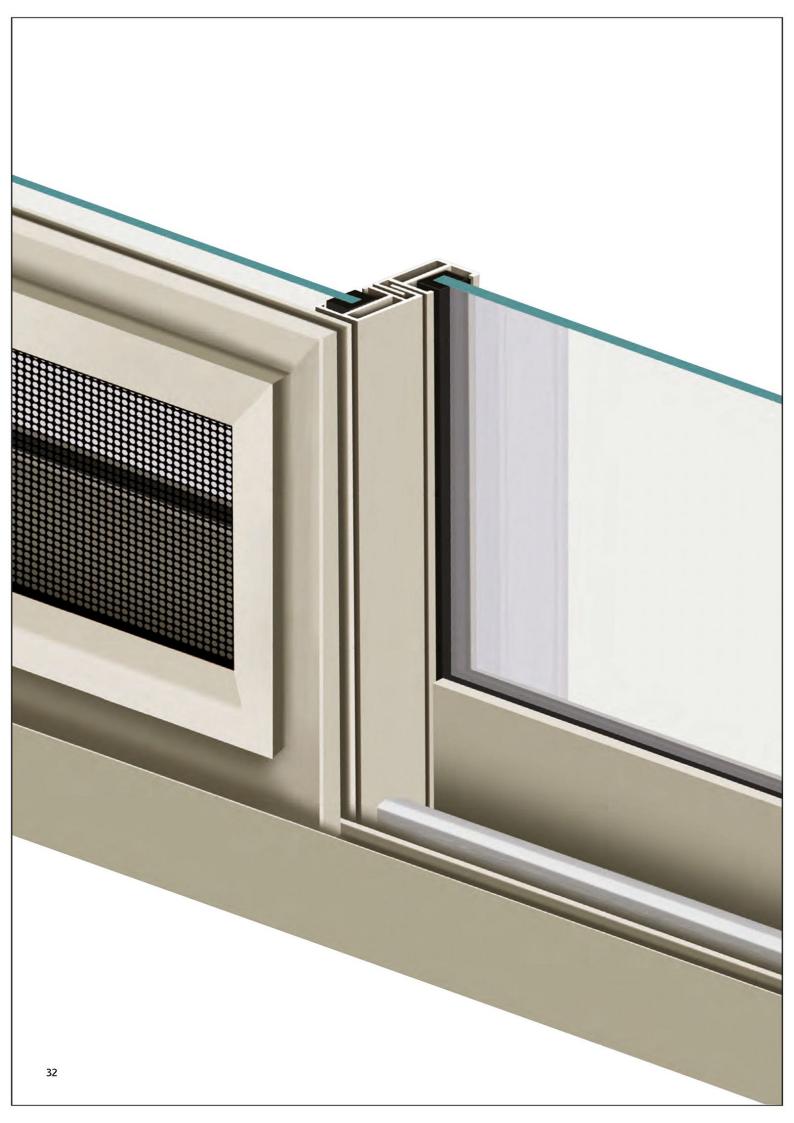



ELEGANCE SERIES EW21/2

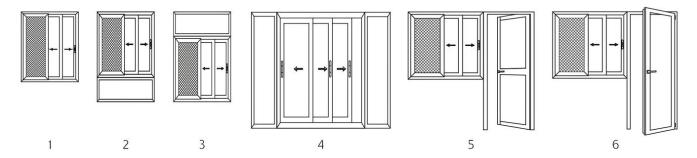

SLIDING WINDOW 21/2 TRACK - 84mm

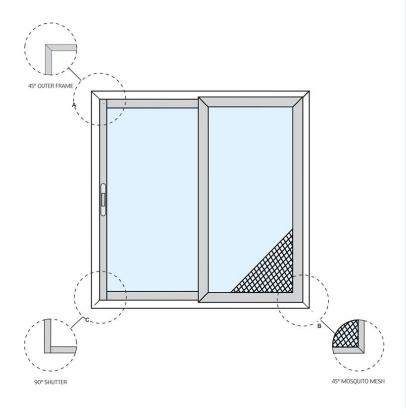



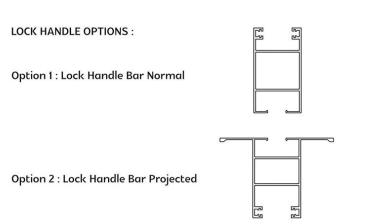

TECHNICAL SPECIFICATION:-

Track Option:

• 21/2 Track - EW21/2

Track	Track	Track	Model
Option	Width mm	Height mm	No.
21/2	84	47	EW21/2
Carala II.a	ا مامه	: 2440 mm ((
Sash He	eignt	: 2440 mm ((max.)
Sash Width		: 1200 mm	(max.)
Sight Line		: 23 mm	
Locking Options		: Single Point Locking	
		Multi Poin	t Locking
Glass Options : Single Glass 5 to 12 mm		ss 5 to 12 mm	

Laminated Glass 11.52 to 18 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS

SS 304 Security
Retractable Pleated

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating

C. Anodizing


FEATURES:

Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available


Interlock profile

Hidden Bottom : Available
 Center Opening : Available
 Integrated Balcony Railings : Available
 With laminated glass


1 Fixed + 1 Sliding Option : Available
 2 Track 4 Shutters : Available

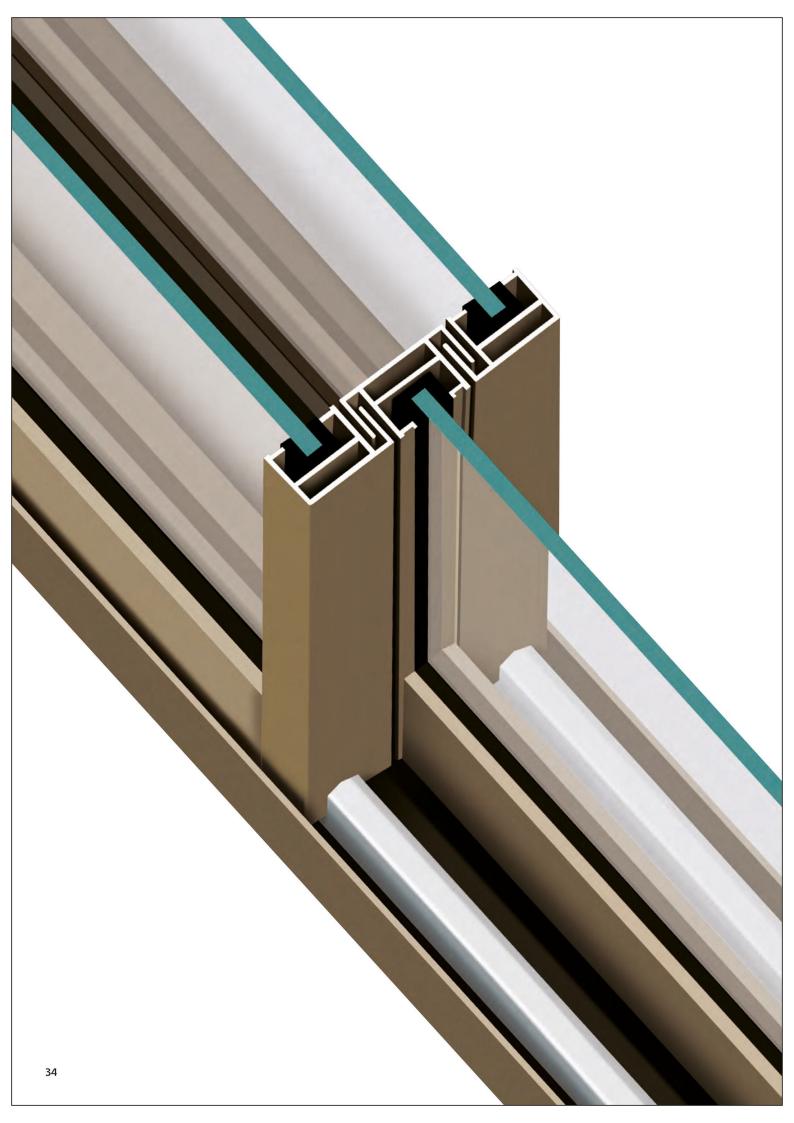



ELEGANCE SERIES E3

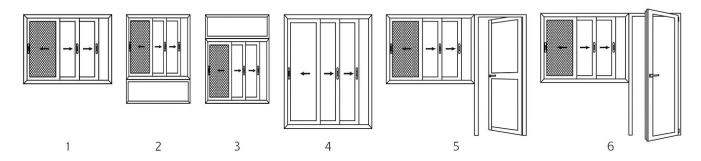

SLIDING WINDOW 3 TRACK - 101 mm

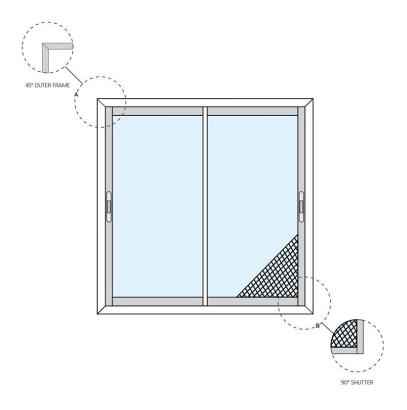



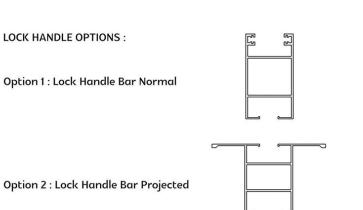

TECHNICAL SPECIFICATION:-

Track Option:

• 3 Track - E3

Track	Track	Track	Model
Option	Width mm	Height mm	No.
3	101	47	E3
Sash Height		: 2440 mm (max.)	
Sash Width		: 1200 mm (max.)	
Sight Line		: 23 mm	
Locking Options		: Single Point Locking Multi Point Locking	
Glass Options		: Single Glass 5 to 12 mm Laminated Glass 11.52 to 18 mm	
Mosquito Mesh		: Fiber Coated Tear Resistant SS SS 304 Security	

FINISHES

A. Powder Coating : Satin
Glossy

Glossy Semi Glossy Matt Texture PVDF

Retractable Pleated

B. Wood Coating


C. Anodizing


FEATURES:

Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available
 Interlock profile
 Center Opening : Available

Integrated Balcony Railings : Available
 With laminated glass

1 Fixed + 1 Sliding Option : Available
 3 Track 6 Shutters : Available

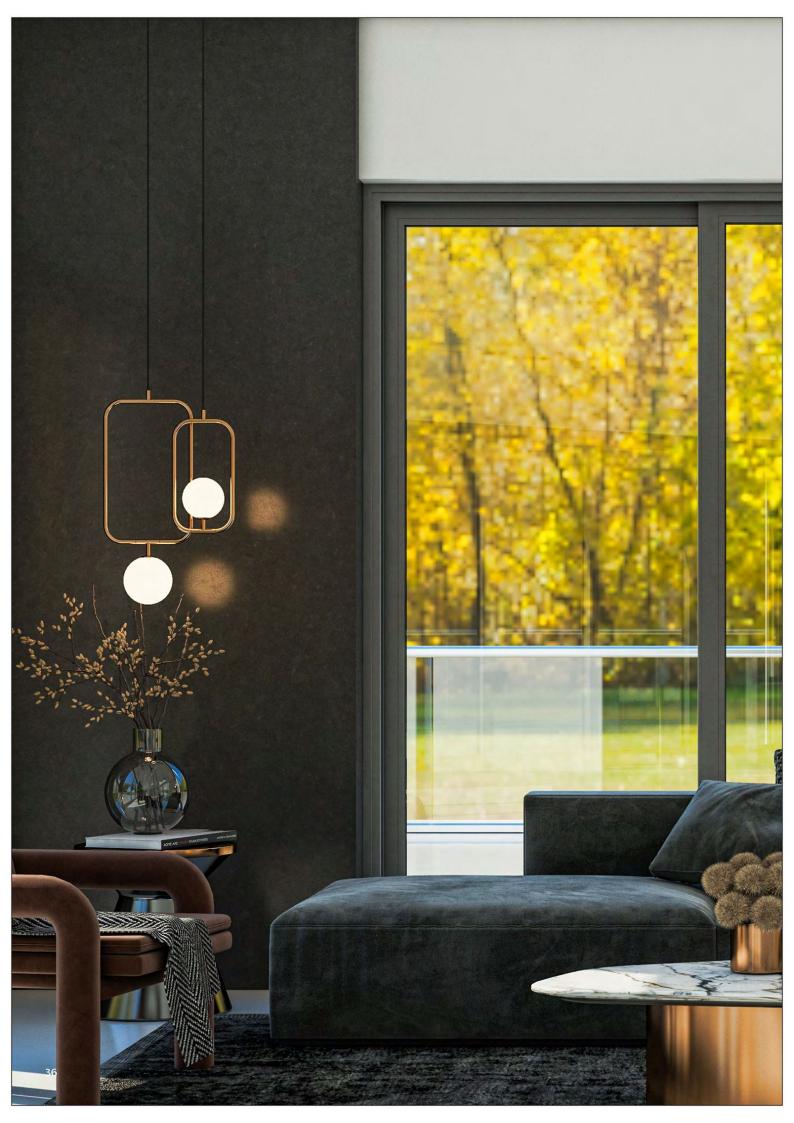

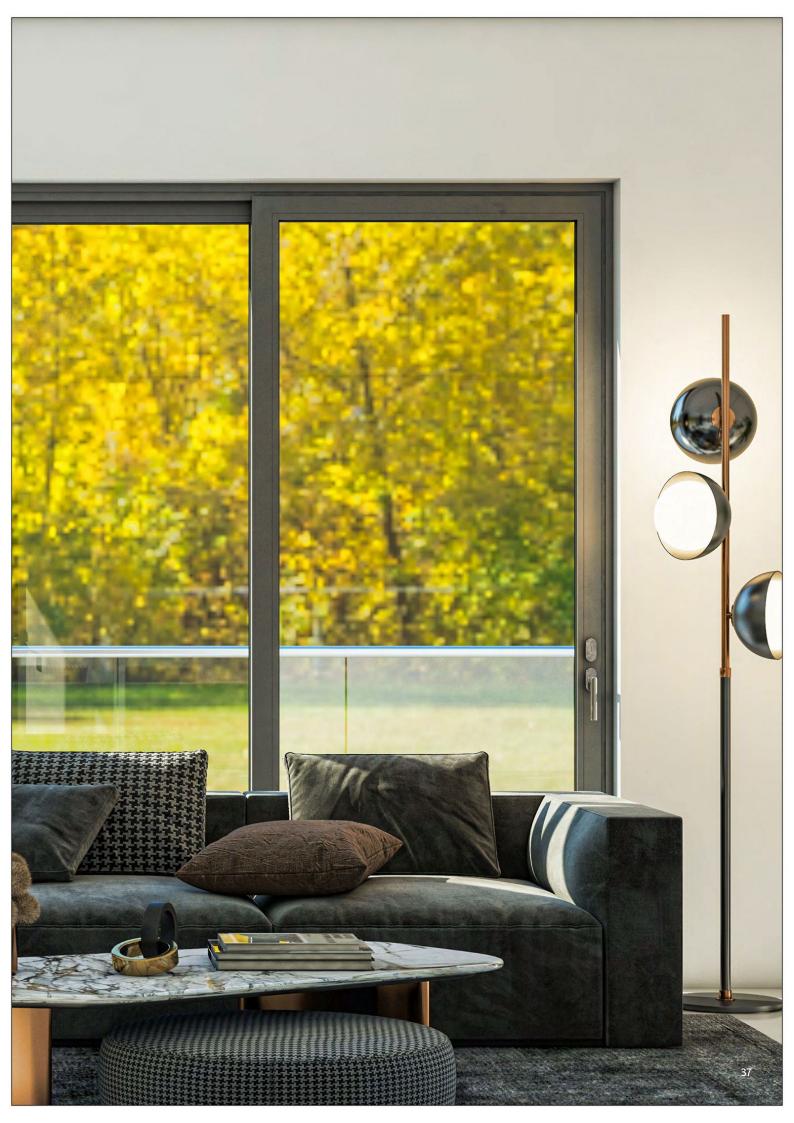





ELEGANCE PLUS SERIES SLIDING WINDOWS

TECHNICAL SPECIFICATION :-

Track Option:

- 2 Track EP2
- 2½ Track EP2½
- 3 Track EP3

Track	Track	Track	Model
Option	Width mm	Height mm (Bottom Track)	No.
2	62	25	EP2
21/2	68	25	EP21/2
3	112	25	EP3
Sash He	ight	: 2440 mm (max.)
Sash Wi	idth	: 1200 mm (max.)
Sight Li	ne	: 23 mm	
Locking Options		: Single Point Locking	
		Multi Point	: Locking
Glass Options		: Single Glass 5 to 12 mm	
		Laminated	Glass 11.52 to 18.52 mm
Mosquit	o Mesh	: Fiber	
		Coated Tea	ır Resistant SS
		SS 304 Sec	urity

Retractable Pleated

KEY FEATURES FOR ELEGANCE PLUS SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- There are 2 options of Lock handle bar Option 1 Normal Lock Handle Bar,
 Option 2 Projected Lock Handle Bar wherein customer can select the type of
 Lock handle bar required during ordering.
- Hurricane Bar an additional re-enforcement is provided on the sliding door for higher wind resistance.
- Extruded powder coated drain covers to reduce inflow of water and insect intrusions
- Silicon coated wool pile for smooth movement of the windows and better sound insulation
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Multi point Locking / Anti lift / Anti Theft plugs , High Quality Safety Glasses are used for enhanced safety
- Sleekly designed windows with minimal obstruction / minimal sightlines

FINISHES

A. Powder Coating : Satin
Glossy
Semi Glossy
Matt


Texture PVDF


B. Wood CoatingC. Anodizing

FEATURES:


: Available Combination Windows Anti Lift System : Available • Hurricane Bar for : Available Interlock profile Low threshold Option : Available Center Opening : Available • Integrated Balcony Railings : Available With laminated glass • 1 Fixed + 1 Sliding Option : Available • 3 Track 6 Shutters : Available

ELEGANCE PLUS SERIES EP3

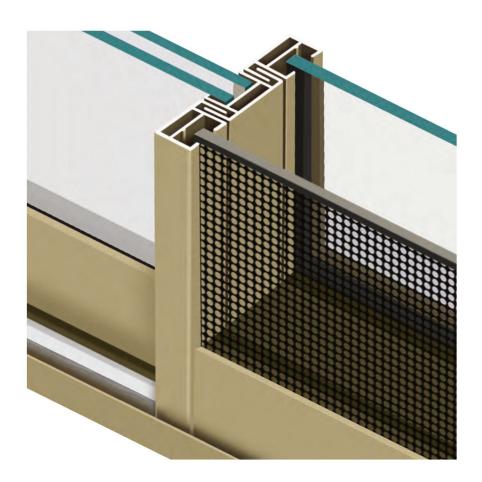


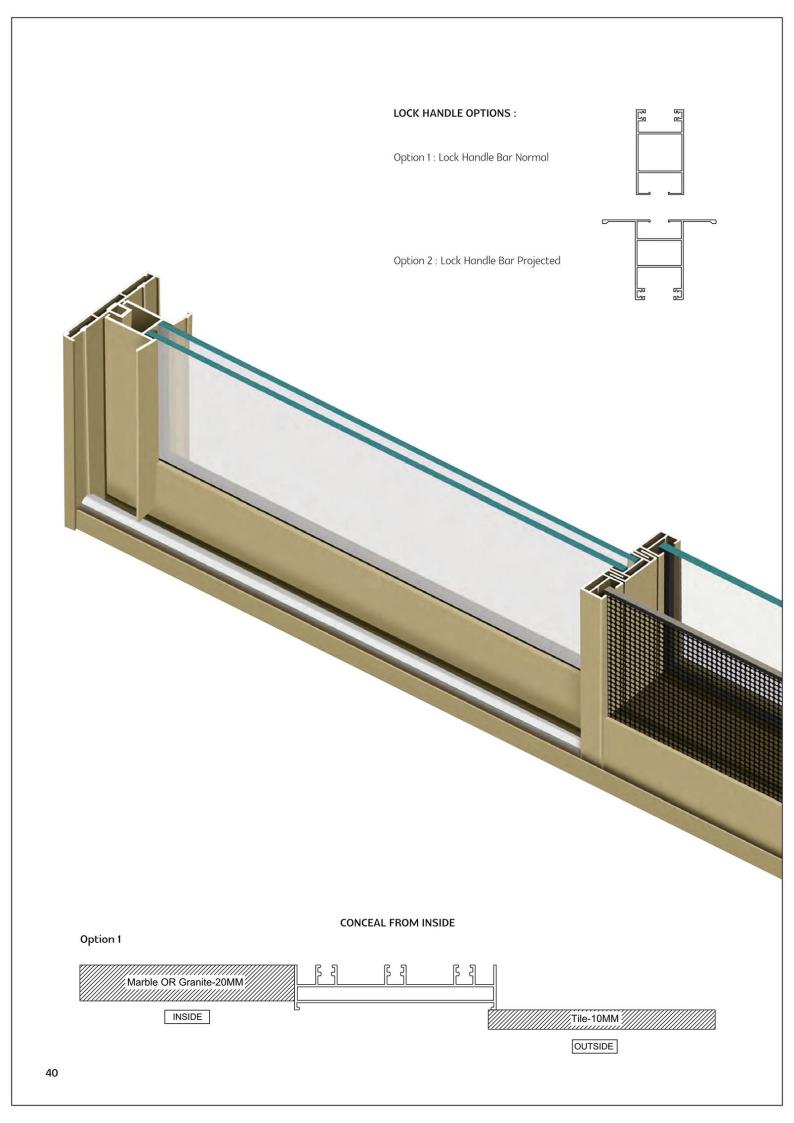

ELEGANCE PLUS SERIES EP3

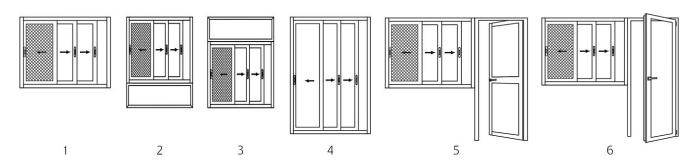

SLIDING WINDOW 3 TRACK - 112mm

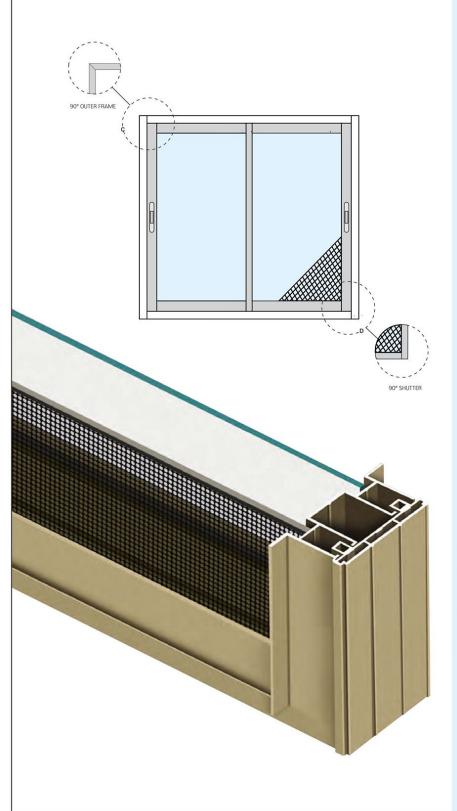

TECHNICAL SPECIFICATION:-

Track Option:

• 3 Track - EP3

Track	Track	Track	Model
Option	Width mm	Height mm (Bottom Track)	No.
3	112	25	EP3
Sash He	ight	: 2440 mm (ı	max.)
Sash Wi	idth	: 1200 mm (max.)
Sight Li	ne	: 23 mm	
Locking	Options	: Single Poin Multi Point	3
Glass O _l	otions	: Single Glas: Laminated	s 5 to 12 mm Glass 11.52 to 18.52 mm
Mosquil	co Mesh	: Fiber Coated Tea SS 304 Seci Retractable	,

FINISHES

A. Powder Coating : Satin
Glossy
Semi Glossy
Matt

Texture PVDF

B. Wood CoatingC. Anodizing

FEATURES:

Combination Windows : AvailableAnti Lift System : Available


Hurricane barrier free

for interlock profile : Available
 Center Opening : Available
 Integrated Balcony Railings : Available

With laminated glass


1 Fixed + 1 Sliding Option : Available
 3 Track 6 Shutters : Available

ELEGANCE PLUS SERIES EP3

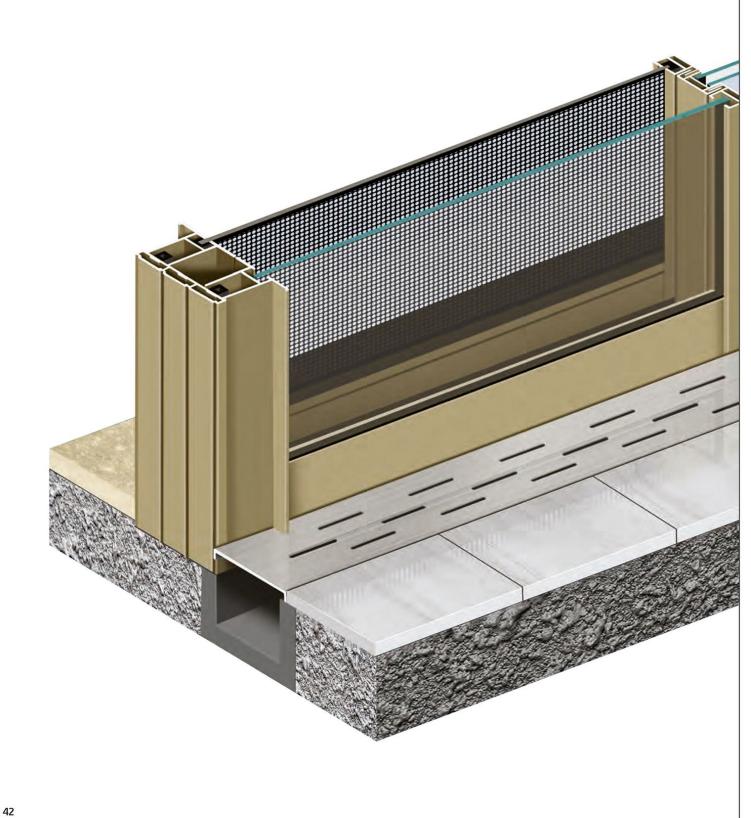





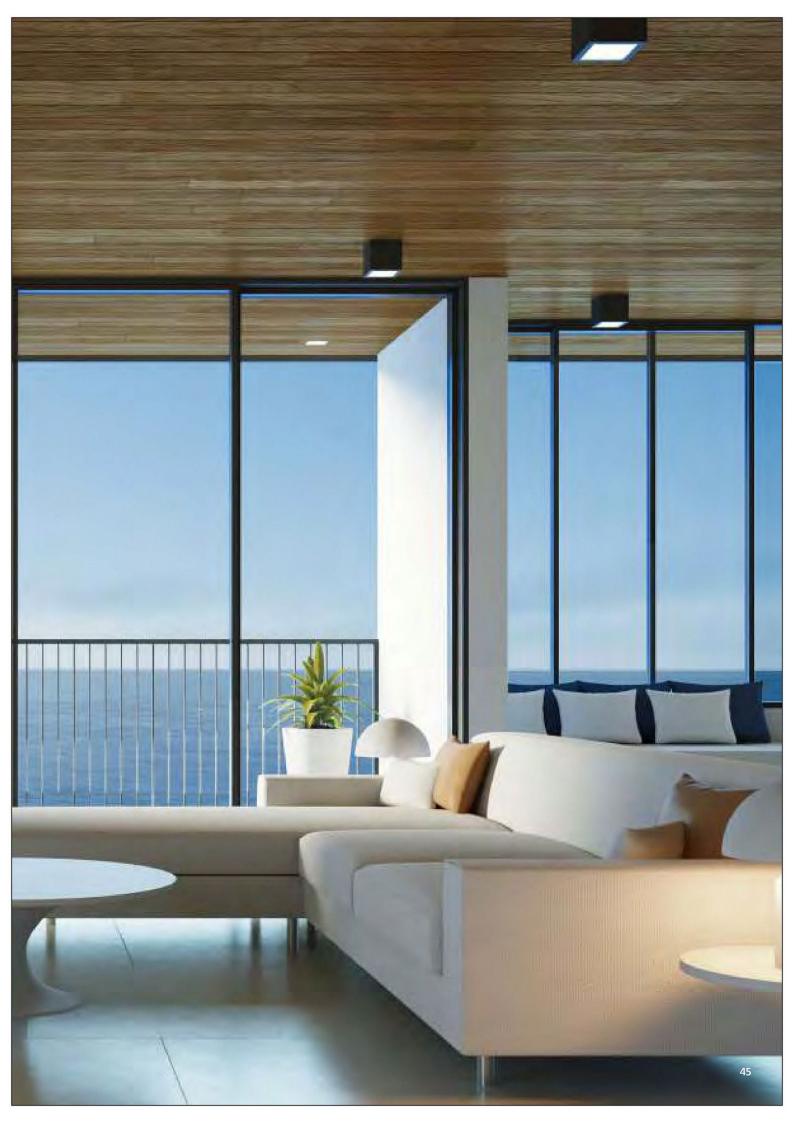





LUXURY SERIES SLIDING WINDOWS

KEY FEATURES FOR LUXURY SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- There are 2 options of Lock handle bar Option 1 Normal Lock Handle Bar,
 Option 2 Projected Lock Handle Bar wherein customer can select the type of
 Lock handle bar required during ordering.
- Hurricane Bar an additional re-enforcement is provided on the sliding door for higher wind resistance.
- Extruded powder coated drain covers to reduce inflow of water and insect intrusions
- Silicon coated wool pile for smooth movement of the windows and better cound insulation.
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Multi point Locking / Anti lift / Anti Theft plugs, High Quality Safety Glasses are used for enhanced safety
- Sleekly designed windows with minimal obstruction / minimal sightlines

TECHNICAL SPECIFICATION:-

Track Option:

- 2 Track L2
- 21/2 Track L21/2
- 2½ Track LW 2½
- 3 Track L3
- 4 Track L4

Track	Track	Track	Model	
	Width mm	Height mm	No.	
2	80	47	L2	
21/2	84	47	L21/2	
21/2	101	47	LW21/2	
3	127	47	L3	
4	175	47	L4	
Sash He	eight	: 3660 mm (max.)		
Sash Width		: 1500 mm (max.)		
Sight Line		: 37 mm		
Locking Options		: Single Point Locking		
		Multi Poin	t Locking	
Glass Options		: Single Glass 5 To 12 mm		
		Laminated	l Glass 11.52 & 13.52 mm	
		Double Glo	ize Glass 18 to 28 mm	
Mosquito Mesh		: Fiber		
		Coated Te	ar Resistant SS	
		SS 304 Sec	,	
		Retractab	le Pleated	

FINISHES

A. Powder Coating : Satin
Glossy
Semi Glossy
Matt
Texture
PVDF

B. Wood CoatingC. Anodizing


FEATURES:

Combination Windows : Available
 Anti Lift System : Available
 Hurricane bar for interlock profile : Available
 Hidden Bottom : Available
 Center Opening : Available

Integrated Balcony Railings : Available
 With laminated glass

1 Fixed + 1 Sliding Option : AvailableGeorgian Bars : Available

LUXURY SERIES L2



LUXURY SERIES L21/2




LUXURY SERIES LW21/2





LUXURY SERIES L3



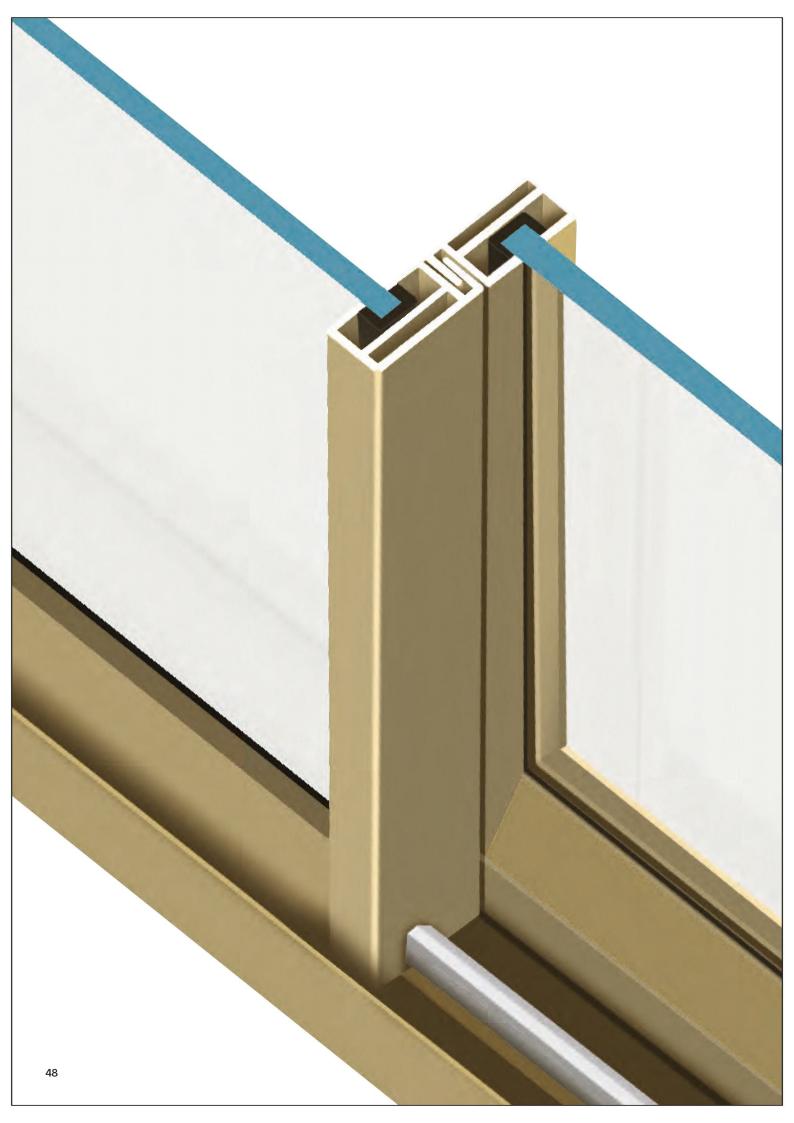


LUXURY SERIES L2

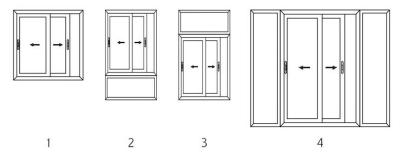



SLIDING WINDOW 2 TRACK - 80 mm

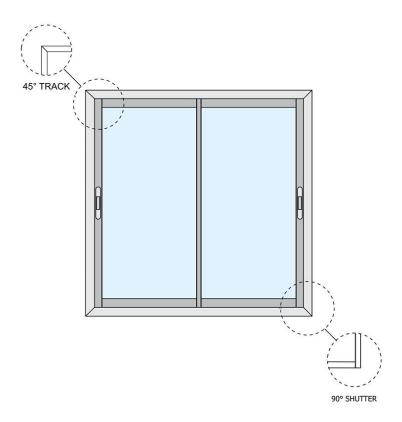

LOCK HANDLE OPTIONS: Option 1: Lock Handle Bar Normal Option 2: Lock Handle Bar Projected

TECHNICAL SPECIFICATION:-

Track Option:

• 2 Track - L2

Track	Track	Track	Model
Option	Width mm	Height mm	No.
2	80	47	L2
Sash He	eight	: 3660 mm	(max.)
Sash W	idth	: 1500 mm	(max.)
Sight Line		: 37 mm	t)

Locking Options : Single Point Locking
Multi Point Locking

Glass Options : Single Glass 5 to 12 mm
Laminated Glass 11.52 to 18 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS

SS 304 Security Retractable Pleated

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating

C. Anodizing

FEATURES:


Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available interlock profile


Center Opening : AvailableIntegrated Balcony Railings : Available

With laminated glass
 1 Fixed + 1 Sliding Option : Available
 Georgian Bars : Available
 2 Track 4 Shutters : Available




LUXURY SERIES L21/2

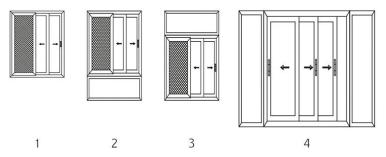



SLIDING WINDOW 21/2 TRACK 84 mm

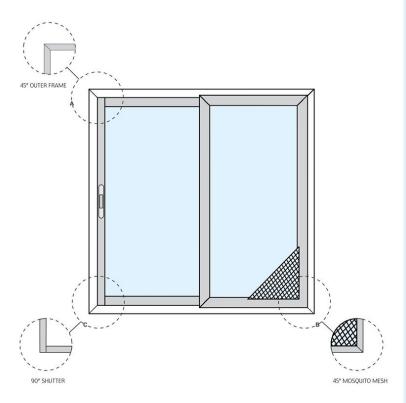

LOCK HANDLE OPTIONS: Option 1: Lock Handle Bar Normal Option 2: Lock Handle Bar Projected

TECHNICAL SPECIFICATION:-

Track Option:

• 2 Track - L21/2

Locking Options :Single Point Locking
Multi Point Locking
Glass Options : Single Glass 5 to 12 mm

Laminated Glass 11.52 & 13.52 mm Double Glaze Glass 18 to 28 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS SS 304 Security Retractable Pleated

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF


B. Wood CoatingC. Anodizing

FEATURES:

Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available interlock profile

Center Opening : Available
 Integrated Balcony Railings : Available
 With laminated glass

1 Fixed + 1 Sliding Option : Available
 Georgian Bars : Available
 2 Track 4 Shutters : Available

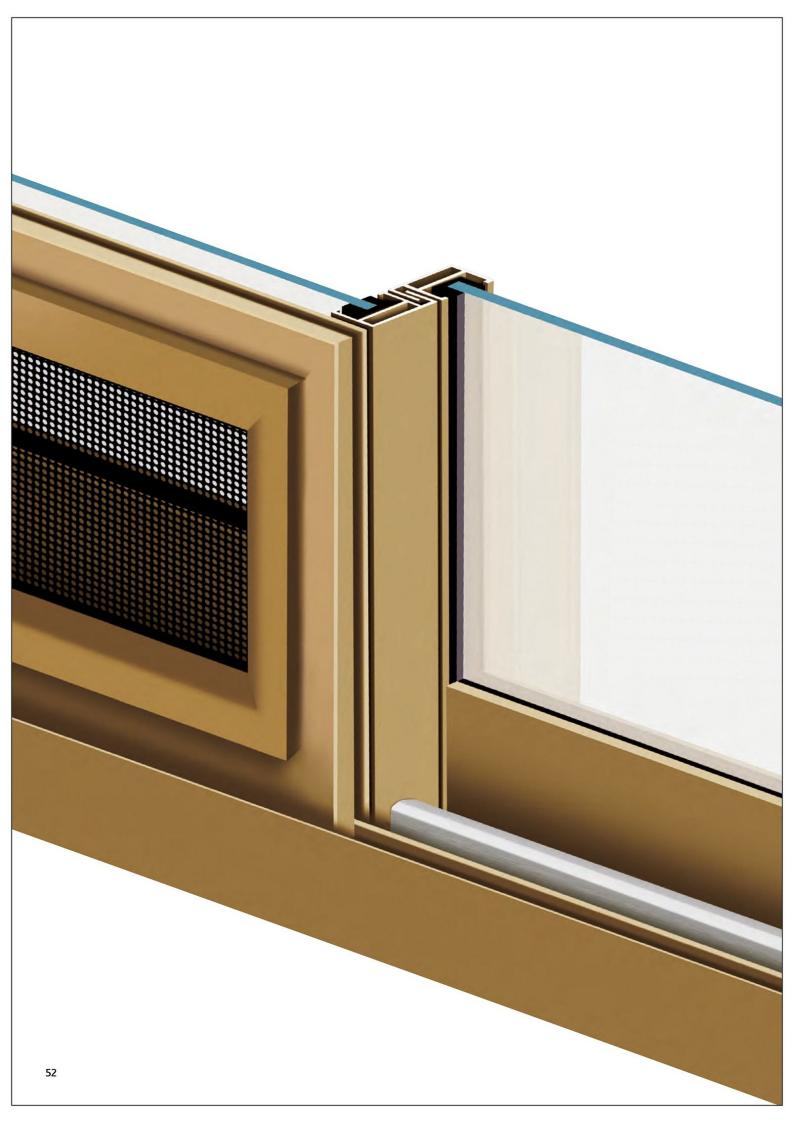





LUXURY SERIES CORNER WINDOWS

KEY FEATURES FOR LUXURY SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- Hurricane Bar an additional re-enforcement is provided on the sliding door for higher wind resistance.
- Extruded powder coated drain covers to reduce inflow of water and insect intrusions
- Silicon coated wool pile for smooth movement of the windows and better sound insulation.
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Multi point Locking / Anti lift / Anti Theft plugs, High Quality Safety Glasses are used for enhanced safety
- Sleekly designed windows with minimal obstruction / minimal sightlines
- Unlimited colors with superior finish with options of Powder Coating, Wood Coating and Anodizing

TECHNICAL SPECIFICATION:-

Track Option:

- 2 Track LC2
- 3 Track LC3

Track Option	Track Width mm	Track Height mm	Model No.
2	80	47	LC2
3	127	47	LC3
Sash He	ight	: 3660 mm	(max.)
Sash Width :1		: 1500 mm	(max.)
Sight Li	ne	: 37 mm	
Locking Options		: Single Poir	nt Locking

Multi Point Locking
Glass Options : Single Glass 5 to 12 mm

Laminated Glass 11.52 & 13.52 mm Double Glaze Glass 18 to 28 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS

SS 304 Security Retractable Pleated

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating

C. Anodizing

FEATURES:

Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available interlock profile


Center Opening : Available
 Integrated Balcony Railings : Available

With laminated glass


1 Fixed + 1 Sliding Option : Available
 Georgian Bars : Available




LUXURY SERIES L3

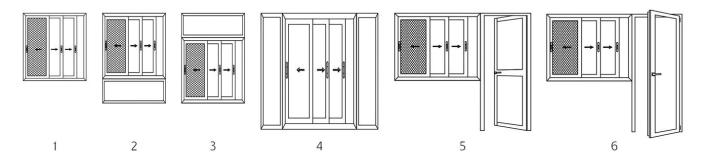


SLIDING WINDOW 3 TRACK - 127mm

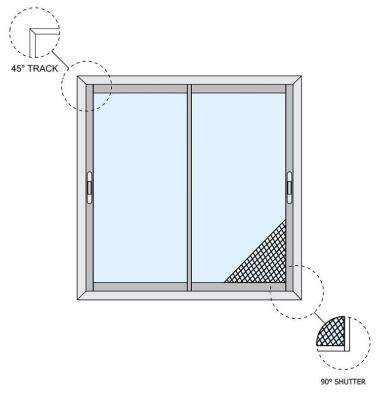

CONCEAL FROM INSIDE



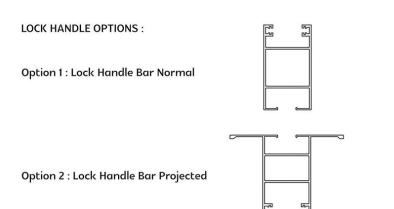

TECHNICAL SPECIFICATION:-

Track Option:

• 3 Track - L3

Track	Track	Track	Mode
Option	Width mm	Height mm	No.
3	127	47	L3
Sash Height		: 3660 mm (max.)	
Sash Width		: 1500 mm	(max.)
Sight Li	ne	: 37 mm	
		6: 1.5	

Locking Options : Single Point Locking

Multi Point Locking

Glass Options : Single Glass 5 to 12 mm

Laminated Glass 11.52 & 13.52 mm Double Glaze Glass 18 to 28 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS

SS 304 Security Retractable Pleated

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating

C. Anodizing


FEATURES:


Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available interlock profile

Center Opening : AvailableIntegrated Balcony Railings : Available


With laminated glass


1 Fixed + 1 Sliding Option : Available
 Georgian Bars : Available
 3 Track 6 Shutters : Available

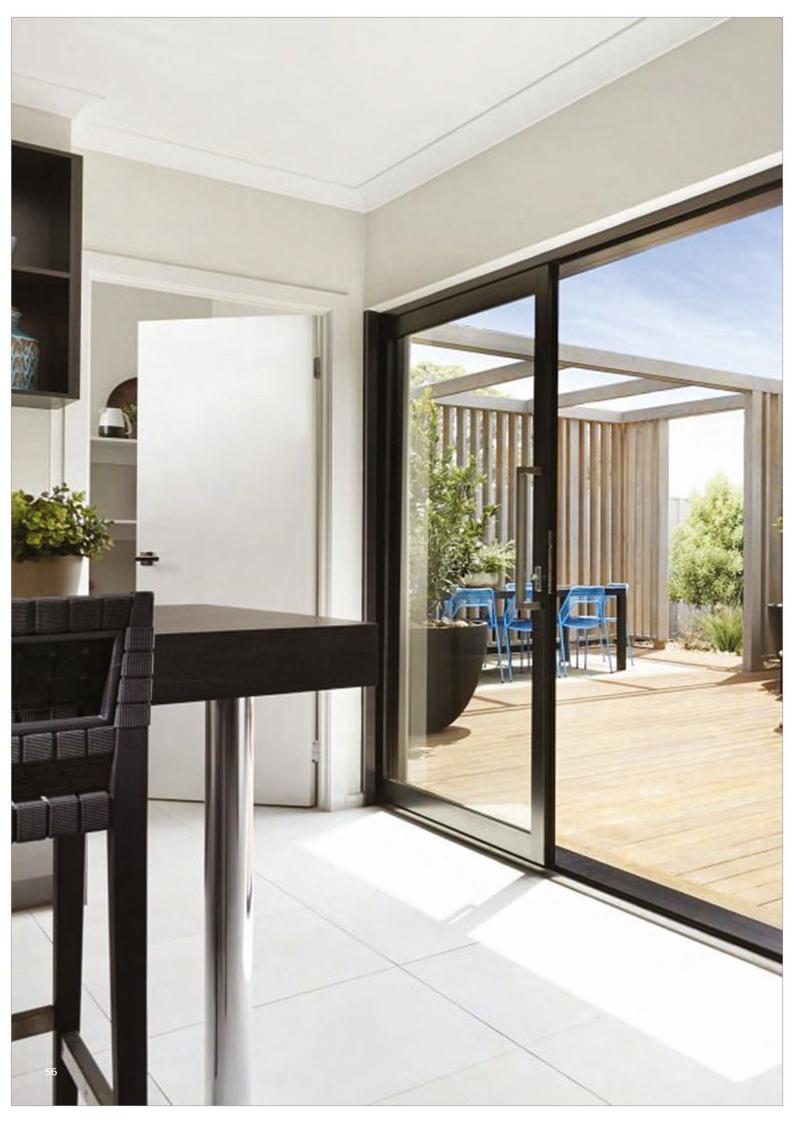

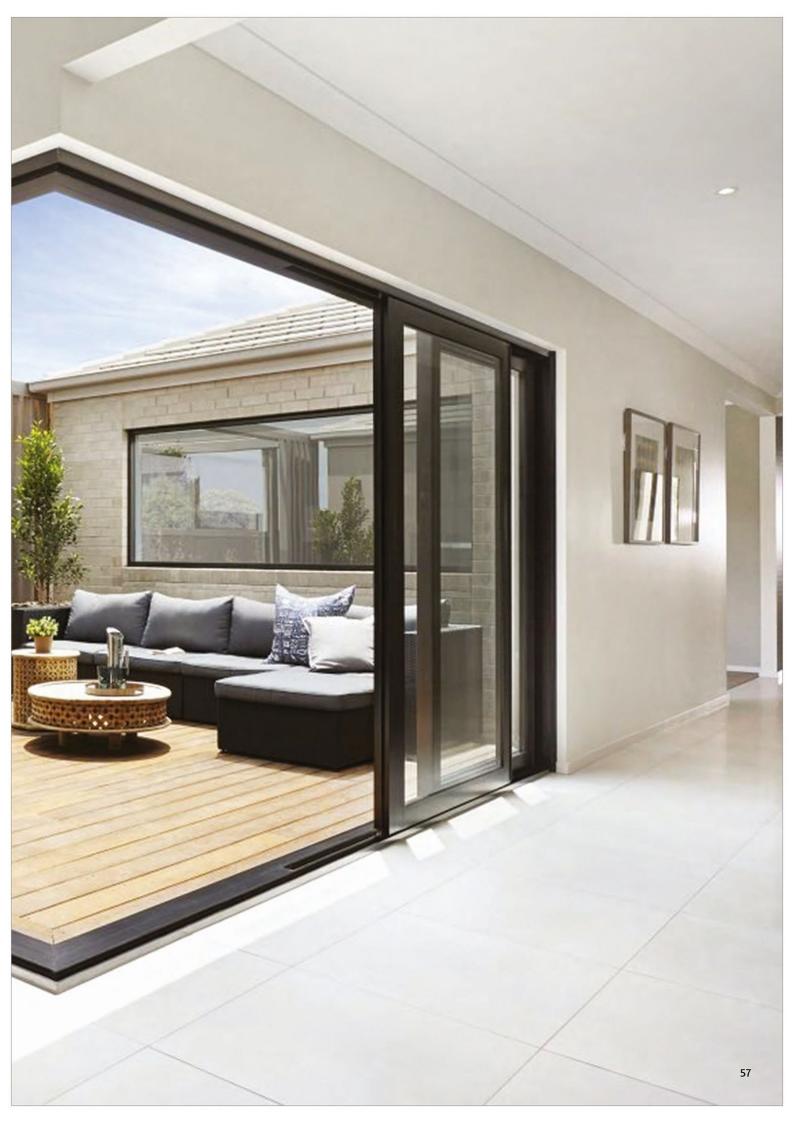


LUXURY SERIES LW21/2

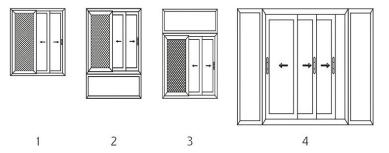




SLIDING WINDOW 21/2 TRACK 101 mm

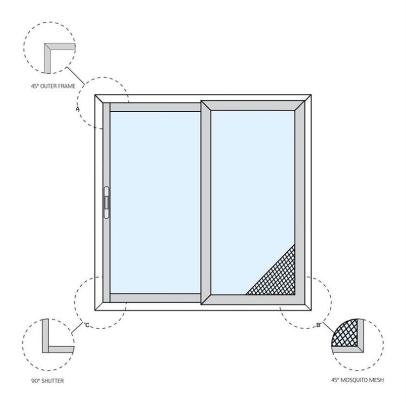

OUTSIDE INSIDE INSIDE INSIDE INSIDE

CONCEAL FROM INSIDE

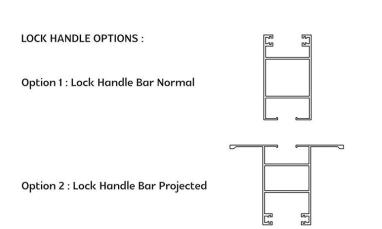

TECHNICAL SPECIFICATION:-

Track Option:

2½ Track - LW2½

Track	Track	Track	Model
Option	Width mm	Height mm	No.
21/2	101	47	LW21/2
Sash Height		: 3660 mm (max.)	
Sash Width		: 1500 mm (max.)	
Sight Li	ne	: 37 mm	

Locking Options : Single Point Locking Multi Point Locking

Glass Options : Single Glass 5 to 12 mm
Laminated Glass 11.52 & 13.52 mm
Double Glaze Glass 18 to 28 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS SS 304 Security Retractable Pleated

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating C. Anodizing


FEATURES :


Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available interlock profile

Center Opening : Available
 Integrated Balcony Railings : Available
 With laminated glass


1 Fixed + 1 Sliding Option
 Georgian Bars
 2 Track 4 Shutters
 : Available
 : Available
 : Available

LUXURY SERIES CORNER WINDOWS

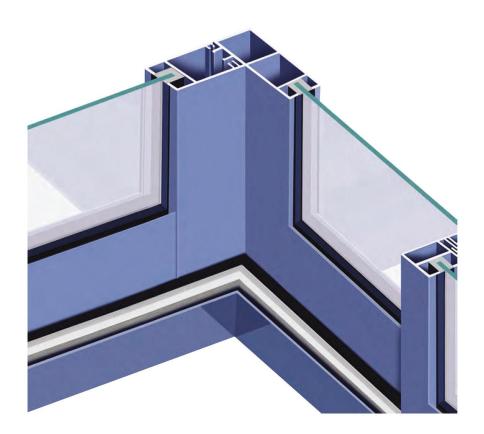

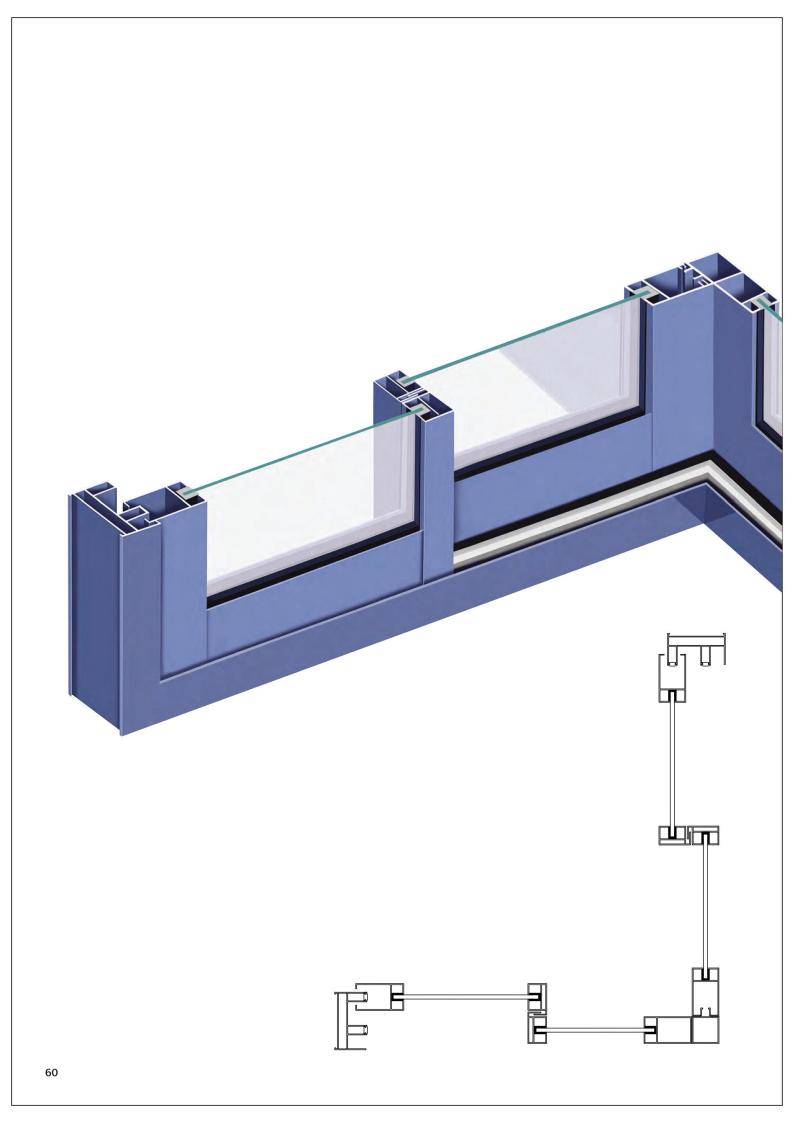

LUXURY SERIES CORNER WINDOWS LC2

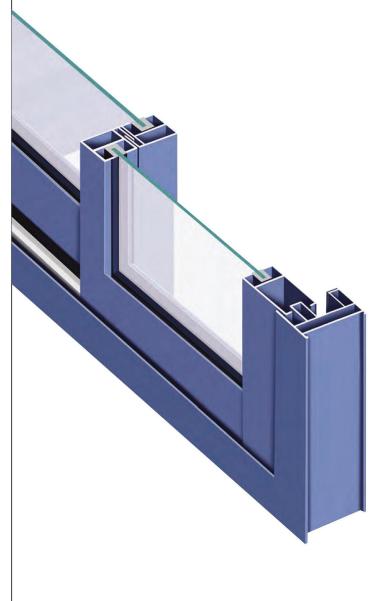

TECHNICAL SPECIFICATION:-

Track Option:

• 2 Track - LC2

• 3 Track - LC3

Track	Track	Track	Mode
Option	Width mm	Height mm	No.
2	80	47	LC2

Sash Height : 3660 mm (max.)
Sash Width : 1500 mm (max.)

Sight Line : 37 mm

Locking Options : Single Point Locking

Multi Point Locking

Glass Options : Single Glass 5 to 12 mm

Laminated Glass 11.52 & 13.52 mm Double Glaze Glass 18 to 28 mm

FINISHES:

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating

C. Anodizing

FEATURES:


Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available


interlock profile

Center Opening : AvailableIntegrated Balcony Railings : Available

With laminated glass

1 Fixed + 1 Sliding Option : Available
 Georgian Bars : Available
 3 Track 6 Shutters : Available

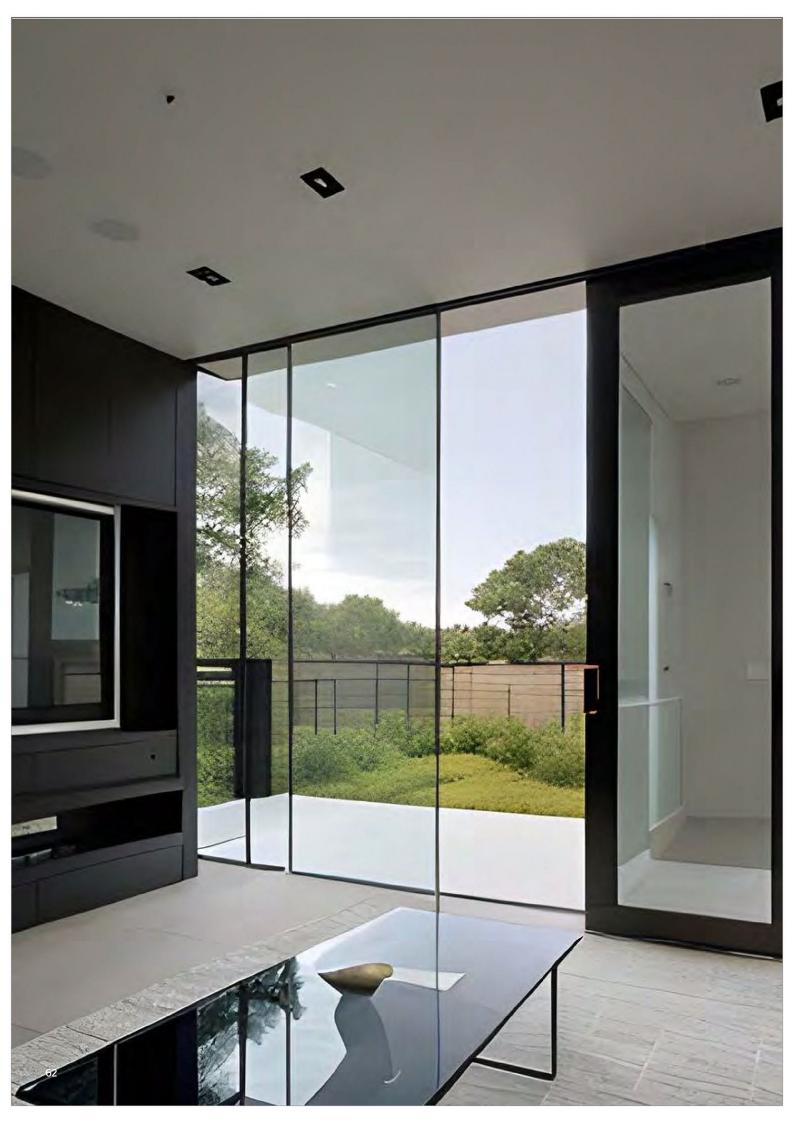

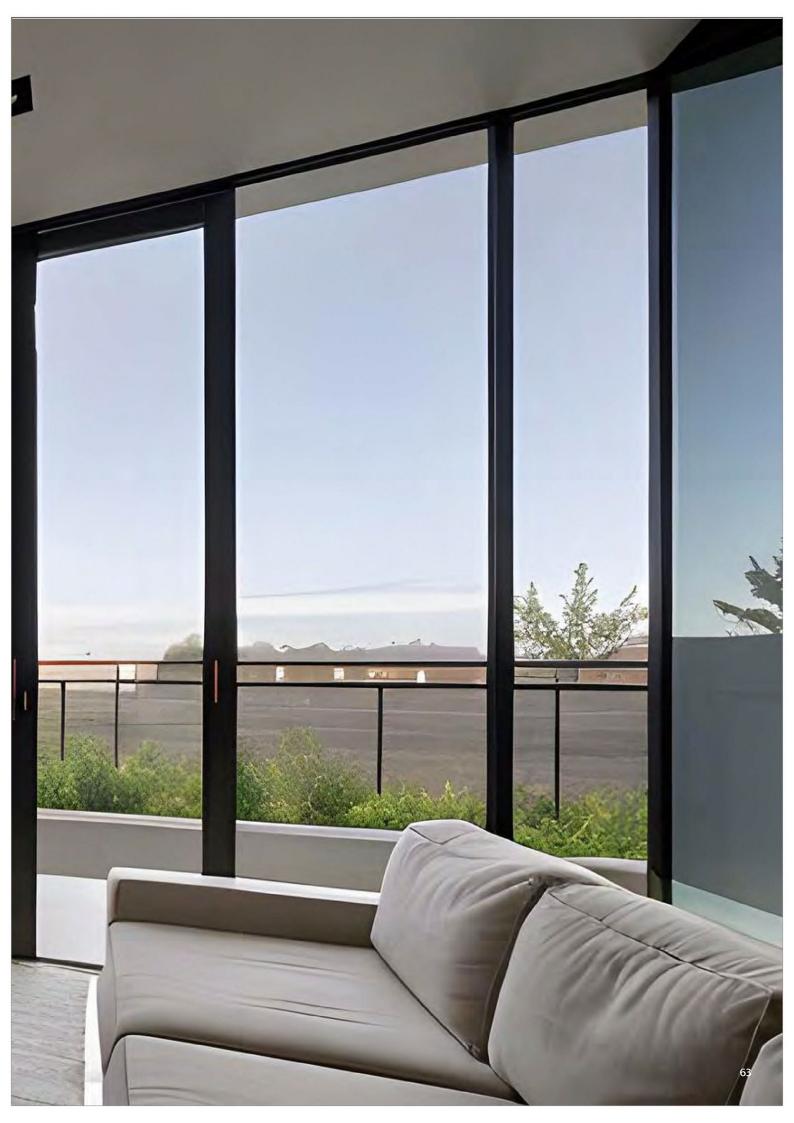





LUXURY OPTIMA SERIES SLIDING WINDOWS

KEY FEATURES FOR LUXURY OPTIMA SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- There are 2 options of Lock handle bar Option 1 Normal Lock Handle Bar,
 Option 2 Projected Lock Handle Bar wherein customer can select the type of
 Lock handle bar required during ordering.
- Hurricane Bar an additional re-enforcement is provided on the sliding door for higher wind resistance.
- Extruded powder coated drain covers to reduce inflow of water and insect intrusions.
- Silicon coated wool pile for smooth movement of the windows and better sound insulation
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Multi point Locking / Anti lift / Anti Theft plugs , High Quality Safety Glasses are used for enhanced safety
- Sleekly designed windows with minimal obstruction / minimal sightlines
- Unlimited colors with superior finish with options of Powder Coating, Wood Coating and Anodizing

TECHNICAL SPECIFICATION:-

Track Option:

• 3 Track - LO3

TrackTrackTrackModelOptionWidth mmHeight mmNo.312747LO3

Sash Height : 3000 mm (max.)
Sash Width : 1500 mm (max.)
Sight Line : 25 mm

Locking Options : Single Point Locking

Multi Point Locking

Glass Options : Single Glass 6mm to 12 mm

Laminated Glass 11.52 & 13.52 mm Double Glaze Glass 18 to 31 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS

SS 304 Security Retractable Pleated

FINISHES:

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood CoatingC. Anodizing

FEATURES:

Combination Windows : Available
 Anti Lift System : Available
 Hurricane Bar for : Available


interlock profile

Center Opening : AvailableIntegrated Balcony Railings : Available

With laminated glass


1 Fixed + 1 Sliding Option
 Georgian Bars
 3 Track 6 Shutters
 : Available
 : Available

LUXURY OPTIMA SERIES LO3

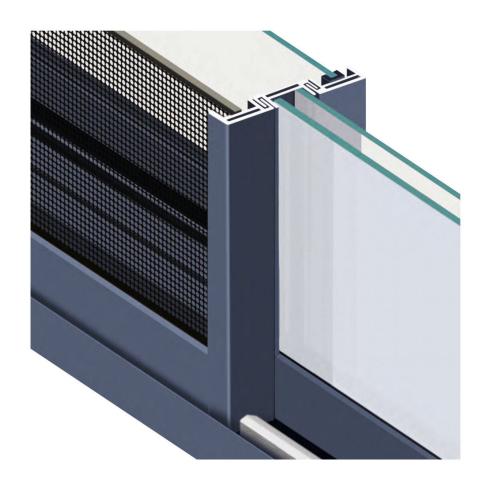




LUXURY OPTIMA SERIES LO3

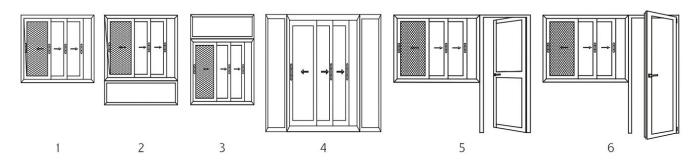

SLIDING WINDOW 3 TRACK - 127mm

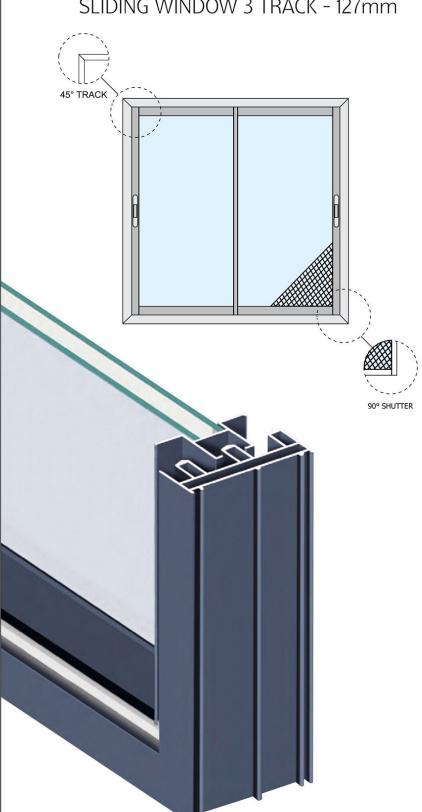

TECHNICAL SPECIFICATION:-

Track Option:

• 3 Track - LO3

Track	Track	Track	Mode
Option	Width mm	Height mm	No.
3	127	47	LO3

Sash Height : 3000 mm (max.) Sash Width : 1500 mm (max.) Sight Line : 25 mm

Locking Options : Single Point Locking Multi Point Locking

Glass Options : Single Glass 6 mm to 12 mm

> Laminated Glass 11.52 & 13.52 mm Double Glaze Glass 18 to 31 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS

SS 304 Security Retractable Pleated

FINISHES:

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture **PVDF**

B. Wood Coating C. Anodizing

FEATURES:

 Combination Windows : Available Anti Lift System : Available **Hurricane Bar for** : Available

interlock profile

Center Opening : Available Integrated Balcony Railings : Available With laminated glass

1 Fixed + 1 Sliding Option : Available

Georgian Bars : Available 3 Track 6 Shutters : Available









OXYGEN SERIES VENTILATOR

Technical Specification:

Frame Option : 40 mm

Opening Options : Side Hung

Top Hung Bottom Hung

No. of Moveable Louvers : 3 Blade Lovers

4 Blade Louvers 5 Blade Louvers 6 Blade Louvers 7 Blade Louvers

Glass Options : 4 mm Pinned Glass

5 mm Frosted Glasses

Fan Options : 150 mm Sweep

Mosquito Mesh : Fiber

Coated Tear Resistant SS

SS 304 Security

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood CoatingC. Anodizing

FEATURES

Fan : Available with & without Fan


Architrave : Available with & without Architrave

Mesh : Available with & without Mesh

KEY FEATURES FOR OXYGEN SERIES


- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- Various options of glass louvers, top hung, side hung with plain glass, side hung with inside & outside openable, Aluminium Fixed Louvers
- Wide choices of Glasses like: Pinned Glass, Frosted Glass, Double Glaze Unit (DGU) Glass, Laminated Glass are available

OXYGEN SERIES VENTILATOR

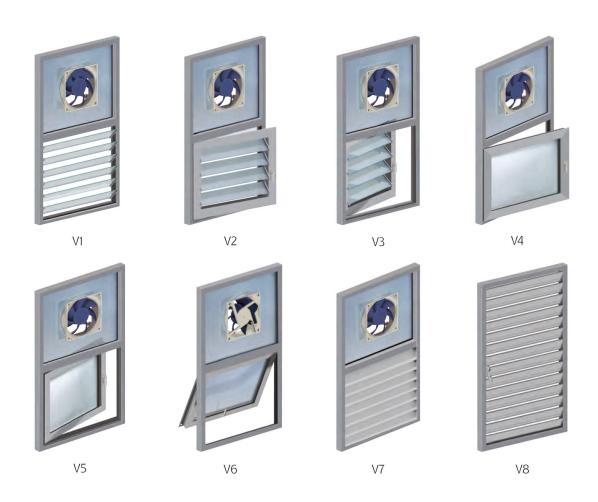

OPTION 1 Ventilator without Architrave



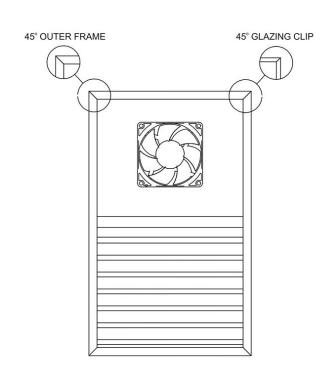

Inside View

Ventilator with FAN with Movable Glass Louver without MESH

OPTION 2 Ventilator with Architrave





Inside View

Outside View

Ventilator with FAN with Movable Glass Louver & with MESH

V SERIES



















OXYGEN SERIES VENTILATORS

- V1 Ventilator with Movable Glass Blade Louvers Available with and without Architray and with and without FAN
- V2 Ventilator side Hung movable glass blade Louvers with inside openable door shutter Available with and without Architray and with and without FAN
- V3 Ventilator side hung movable glass blade louvers with outside openable door shutter Available with and without Architray and with and without FAN
- V4 Ventilator side hung inside openable glass door shutter -Available with and without Architray and with and without FAN
- V5 Ventilator side hung outside openable glass door shutter -Available with and without Architray and with and without FAN
- **V6** Ventilator with outside openable Top Hung glass door shutter-Available with and without Architray and with and without FAN
- V7 Ventilator with Fixed Aluminium Louvers Available with and without Architray and with FAN
- V8 Ventilator with Fixed Aluminium Louvers

OPTION 1 Ventilator without Architrave



OPTION 2 Ventilator with Architrave



Technical Specification:-

Frame Option : 40 mm

Opening Options : Side Hung

Top Hung Bottom Hung

No. of Moveable Louvers : 3 Blade Lovers

4 Blade Louvers 5 Blade Louvers 6 Blade Louvers 7 Blade Louvers

Glass Options : 4 mm Pinned Glass

5 mm Frosted Glasses

Fan Options : 150 mm Sweep

Mosquito Mesh : Fiber

Coated Tear Resistant SS

SS 304 Security

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood CoatingC. Anodizing

FEATURES

Fan : Available with and

without Fan

Architray : Available with and

without Architray

Mesh : Available with and

without Mesh









SOPHISTICA SERIES SLIDING & FOLDING WINDOWS

Technical Specification:-

Outer Frame Height: 50.5 mm
Outer Frame Width: 90.0 mm

Outer Frame Height

with Low threshold: 13.5 mm Sash Weight Max.: 150 Kgs

Locking Options : Multi Point Locking **Glass Options** : Single Glass 5 to 12 mm

Laminated Glass 11.52 to 13.52 mm Double Glaze unit 18 to 32 mm

Barrier Free Low

threshold

: Available

Hidden Bottom : Available

from Inside

Dimensions:-

 U Value
 : 1.5 W/m² K

 Sight Line
 : 125 mm

 Air
 : 600 Pa

 Water
 : 600 Pa

 Wind
 : 1200 Pa

Finishes :-

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating C. Anodizing

Features :-

- 70 mm Frame Depth (Slim profiles for large glass rate)
- Narrow profile offering minimum sight lines 42 mm Interlock wrap around glazing
- Heavy Duty sliding folding door suitable for use in commercial application where heavy usage is Expected
- Four stainless steel wheels in bottom and four on top ensures larger door size smooth and consistent operation.
- In or Out opening
- Optional top hang roller.
- Three point hook locking
- · Anti finger trapping gasket
- Available in all standard RAL colors


Designed to BS6375 (weather testing)

- Shootbolt at interval points. Handle with key locking
- Vision fold is an ideal choice for applications that required large or runs of multiple sashes
- Sashes slide on four stainless wheel sitting on a steel track which give a smooth opening action

KEY FEATURES FOR SOPHISTICA SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- High quality Ball bearing wheels are used
- Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed, a versatile and durable type of rubber for many applications.
- Options of Glazing thickness are from SGU from 5 mm to 12 mm, DGU from 18mm to 32mm, Laminated Glasses — Make Saint Gobain.
- Limit less colours and textures, Satin, anodizing, powder coating, wood finish
 which is available in vast range of options for windows to create best
 aesthetic combination with surrounding interior / exterior design
- Rust Free and requires no maintenance.
- Hardware's Locking systems with fold hinge with pull handle and accessories for long lasting trouble free performance with Die-casted lever in the lock.
- Customized solutions, fabrication, and installation by experienced fabricators.
- Mechanical Strong corner joints exclusively designed for comfortable interior and visual aesthetic.

OPTION OF SOPHISTICA SERIES SLIDING & FOLDING WINDOWS

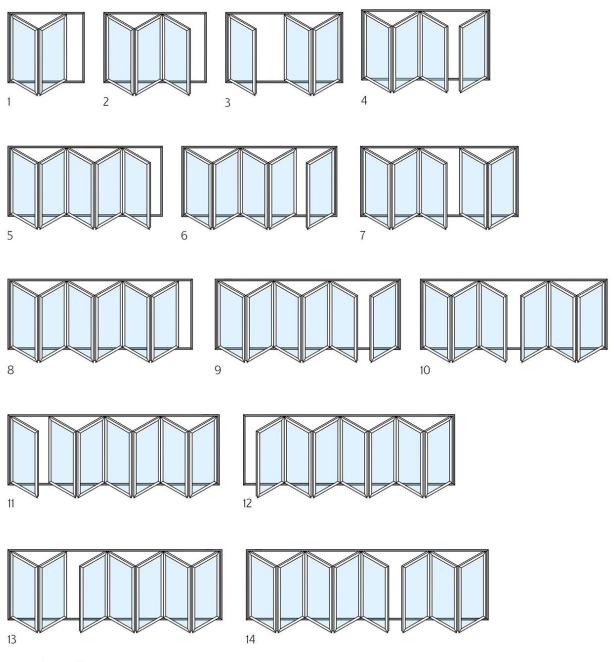

Floor Mounting Options :-

Option 1: Concealed Low Threshold Profile

INSIDE

Marble OR Granite-20MM

50.5

OUTSIDE

13.5

INSIDE

Marble OR Granite-20MM


Tile 10MM

Tile-10MM

INSERT TO FLOOR

Option 2: Hidden Bottom from Inside


Option 3: Low Threshold Profile




77



SLIDING & FOLDING SF4 SERIES 4+0

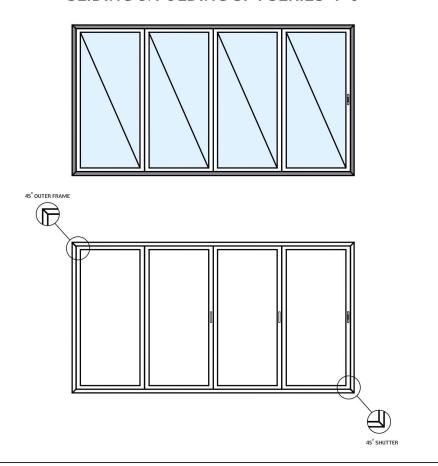

SLIDING & FOLDING SF2 SERIES 2+1

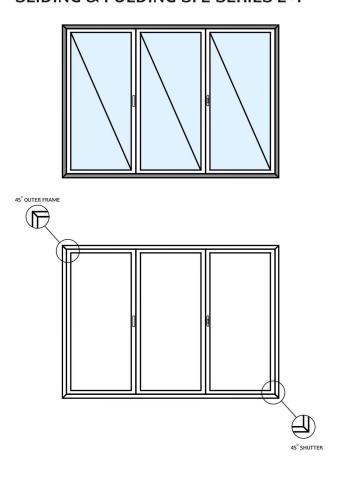





SPECTRA SERIES VERTICAL SLIDE WINDOWS

Technical Specification:

Track Option

2 Track - SVS2

3 Track - SVS3

Glass Options

Track Option	Track Width mm	Track Height mm	Model No.
3	126	40	SVS3

Window Height : 3000 mm Sash Width : 1500 mm

Locking Options : Single Point Locking Multi Point Locking

: Single Glass 5 to 12 mm

Laminated Glass 11.52 to 13.52 mm

Double Glaze Unit 18 mm

Mosquito Mesh : Fiber

Coated Tear Resistant SS

SS 304 Security Retractable Pleated

FINISHES

A. Powder Coating : Satin


Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating C. Anodizing

KEY FEATURES FOR SPECTRA SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- Silicon coated wool pile for smooth movement of the windows and better sound insulation
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Sleekly designed windows with minimal obstruction / minimal sightlines



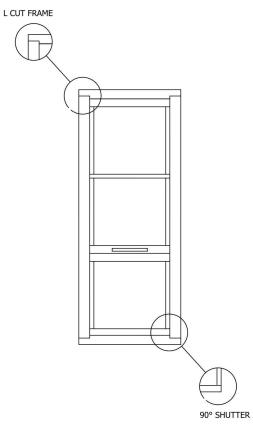

INSIDE VIEW





PIXEL SERIES TILT & TURN

Technical Specification:

Frame Option : Model No. Frame Width Frame Height

 PTT1
 50 mm
 58 mm

 PTT2
 80 mm
 58 mm

 PTT3
 84 mm
 58 mm

 PTT4
 102 mm
 58 mm

Sash Width : 700 mm (Max.)
Sash Height : 1500 mm (Max.)
Opening Options : Side Hung

Glass Options : Single Glass 5 to 12 mm

Laminated Glass - 11.52, to 13.52 mm Double Glaze Unit Glass - 18 to 24 mm

Hinge Options : Butt Hinges

Friction Hinges Hidden Hinges

FINISHES

A. Powder Coating : Satin


Glossy Semi Glossy Matt Texture PVDF


B. Wood Coating C. Anodizing

KEY FEATURES FOR PIXEL SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- Silicon coated wool pile for smooth movement of the windows and better sound insulation
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Sleekly designed windows with minimal obstruction / minimal sightlines



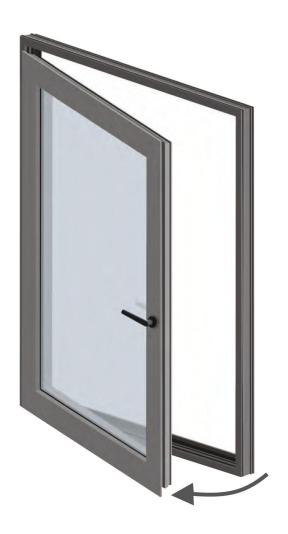

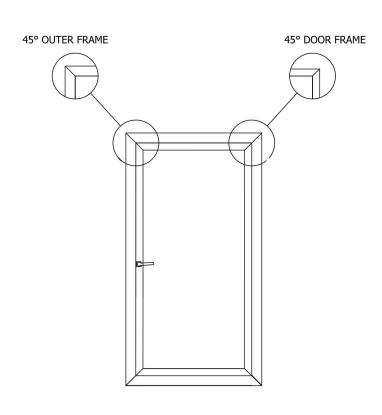





URBAN SERIES TOP HUNG & CASEMENT WINDOWS

Technical Specification:-

CASEMENT WINDOW

Frame Option : Model No. Frame Width Frame Height

UC1 40 mm 39 mm UC2 60 mm 39 mm UC3 68 mm 39mm

Sash Width: 650 mm (Max.)Sash Height: 1800 mm (Max.)Opening Options: Side Opening inside

TOP HUNG WINDOW

Frame Option : Model No. Frame Width Frame Height

UT1 40 mm 39 mm UT2 60 mm 39 mm UT3 60 mm 39 mm

Sash Width: 600 mm (Max.)Sash Height: 1000 mm (Max.)Opening Options: Top Opening inside

Glass Options : Single Glass - 5, 6, 8, 10 & 12 mm

Toughened Laminated Glass - 11.52,

13.52 & 17.52 mm

Double Glaze Unit Glass - 18, 24,

& 28 mm

Locking Options : Single Point Locking

Multi Point Locking

Hinge Options : Butt Hinges.

Friction Hinges

Mesh : Roll Down

Retractable Pleated Mesh

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood CoatingC. Anodizing

FEATURES


Combination Windows : Available **Georgian Bars** : Available

KEY FEATURES FOR URBAN & VOGUE SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Sleekly designed windows with minimal obstruction / minimal sightlines





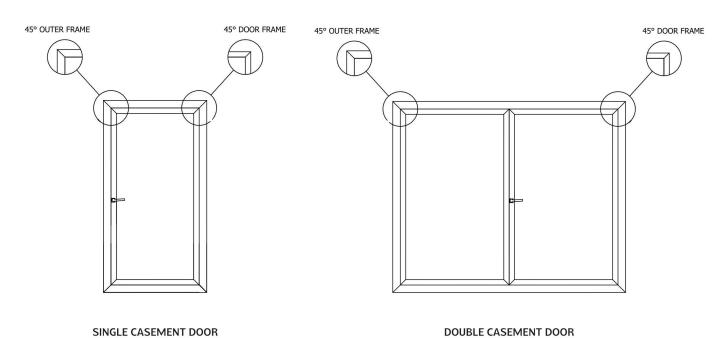





VOGUE SERIES TOP HUNG & CASEMENT WINDOWS

Technical Specification:

Casement Window

Frame Option : Model No. Frame Width Frame Height

 VC1
 50 mm
 46 mm

 VC2
 80 mm
 46 mm

 VC2
 84 mm
 46 mm

 VC2
 102 mm
 46 mm

Sash Width : 700 mm (Max.)
Sash Height : 2000 mm (Max.)
Opening Options : Side Opening outside

Top Hung Window

Frame Option : Model No. Frame Width Frame Height

VT1 50 mm 46 mm VT2 80 mm 46 mm VT2 84 mm 46 mm VT2 102 mm 46 mm

Sash Width: 750 mm (Max.)Sash Height: 1200 mm (Max.)Opening Options: Top Opening outside

Glass Options : Single & Toughened Glass - 5, 6, 8, 10

& 12 mm

Toughened Laminated Glass - 11.52,

13.52 & 17.52 mm

Double Glaze Unit Glass - 18, 24,

& 28 mm

Door Options : Manual Honeycomb - 31 DGU

Manual Venation Blinds - 31 DGU

Locking Options : Single Point Locking

Multi Point Locking

Hinge Options : Butt Hinges.

Friction Hinges

Mesh : Roll Down

Retractable Pleated Mesh

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood CoatingC. Anodizing

FEATURES


Combination Windows : Available **Georgian Bars** : Available

KEY FEATURES FOR VOGUE SERIES


- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Sleekly designed windows with minimal obstruction / minimal sightlines










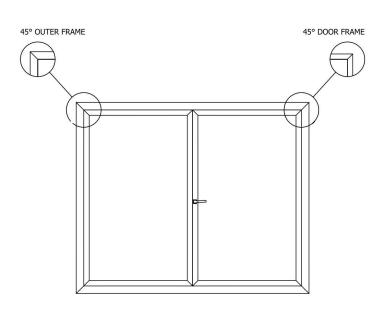


DOUBLE CASEMENT DOOR


Various Combinations of Single and Double

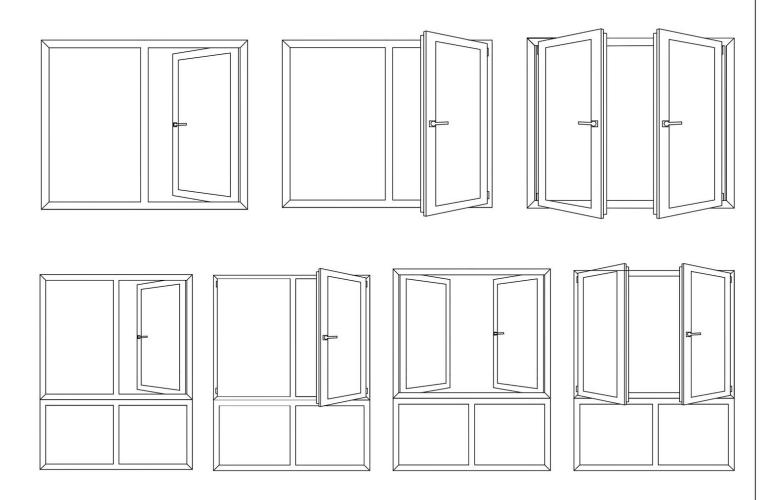


Various Combinations of Top Hung Windows

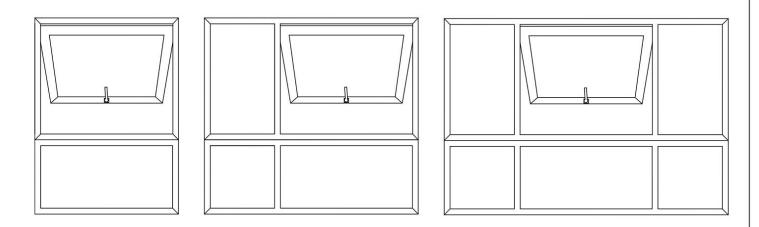

Casement Windows for URBAN & VOGUE Series

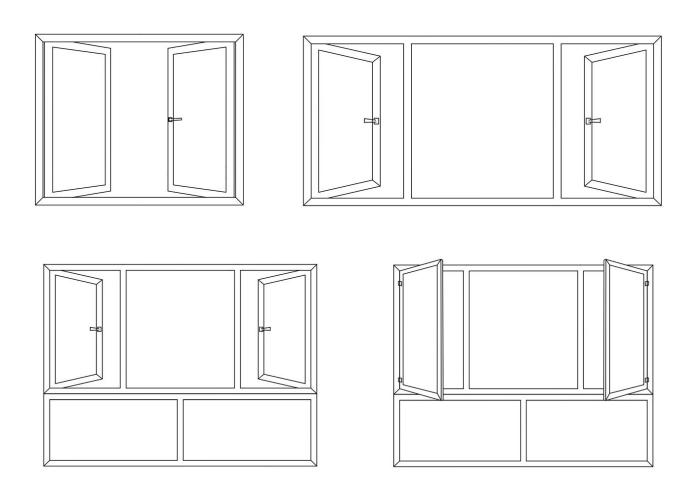

with Fixed combination for URBAN & VOGUE Series

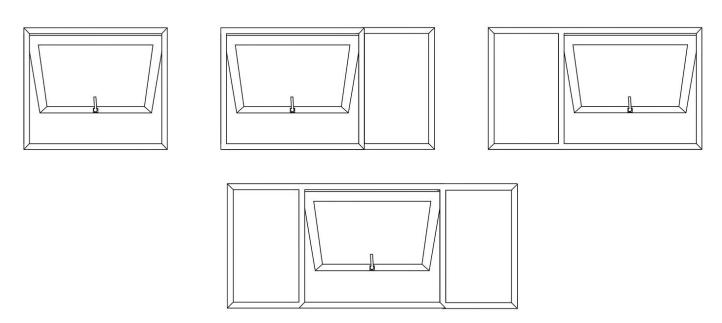





GLAZED SERIES FIXED WINDOWS

Technical Specification:

URBAN SERIES

Fixed Window

Frame Option : Model No. Frame Width Frame Height

FW1 50 mm 46 mm FW2 60 mm 39 mm FW3 68 mm 39 mm FW4 80 mm 46 mm FW5 84 mm 46 mm FW6 102 mm 46 mm

Width : 2100 mm (Max.)

Height : 2400 mm (Max.)

Opening Options : Fixed Glass

Glass Options : Single Glass - 5 , 6 , 8 , 10 & 12 mm

Toughened Laminated Glass - 11.52, 13.52

& 17.52 mm Double Glaze Unit Glass - 18, 24 mm

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF


B. Wood CoatingC. Anodizing


FEATURES

Fixed Combination: AvailableCorner Fixed Glass to Glass joint: AvailableOnly Mesh: AvailableGeorgian Bars: Available


KEY FEATURES FOR URBAN & VOGUE SERIES


- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)
- Sleekly designed windows with minimal obstruction / minimal sightlines

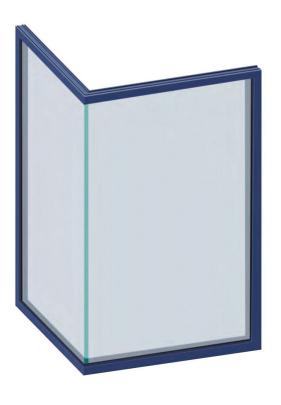

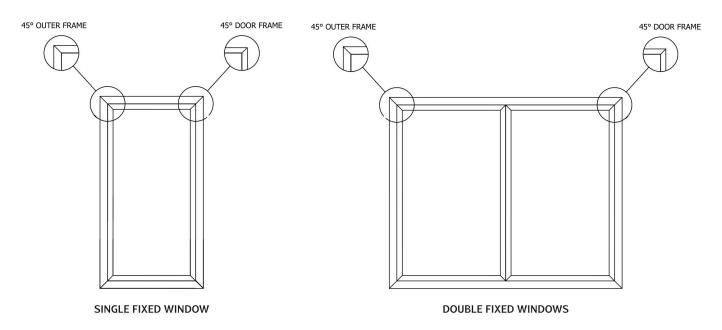

Various Combinations of Fixed Windows

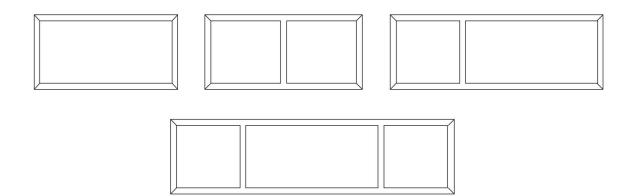

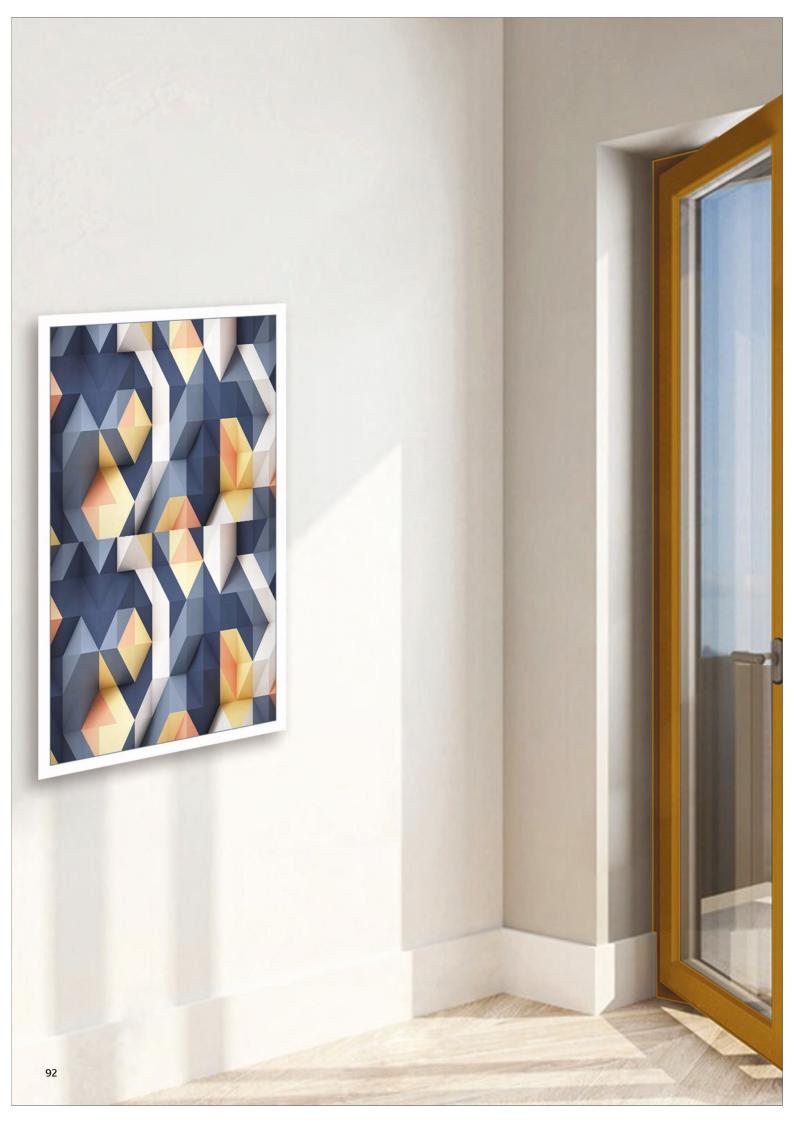







URBAN SERIES DOORS

Technical Specification:

Frame Option : Model No. Frame Width Frame Height

UD1 40 mm 55 mm UD2 40 mm 39 mm

Sash Width : 1200 mm (Max.)
Sash Height : 2440 mm (Max.)

Glass Options : Single Glass - 5, 6, 8, 10 & 12 mm

Toughened Laminated Glass - 11.52,

13.52 & 17.52 mm

Double Glaze Unit Glass - 18, 24,

& 28 mm

Locking Options : Single Point Locking

Multi Point Locking

Hinge Options: Butt Hinges

Mesh : Roll Down

Retractable Pleated Mesh

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating
C. Anodizing

FEATURES

Combination Doors : Available **Georgian Bars** : Available

KEY FEATURES FOR URBAN SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)







VOGUE SERIES DOORS

Technical Specification:

Frame Option : Model No. Frame Width Frame Height

 VD1
 50 mm
 46 mm

 VD2
 80 mm
 46 mm

 VD3
 84 mm
 46 mm

 VD4
 102 mm
 46 mm

Sash Width : 1200 mm (Max.)
Sash Height : 3000 mm (Max.)

Glass Options : Single Glass - 5 , 6 , 8 , 10 & 12 mm

Toughened Laminated Glass - 11.52,

13.52 & 17.52 mm

Double Glaze Unit Glass - 18, 24,

& 28 mm

Locking Options : Single Point Locking

Multi Point Locking

Hinge Options : Butt Hinges

Mesh : Roll Down

Retractable Pleated Mesh

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood Coating C. Anodizing

FEATURES

Combination Doors : Available **Georgian Bars** : Available

KEY FEATURES FOR VOGUE SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)




Single Door Combination various types for Urban / Vogue / Finesse Series

Inside Openable Doors with Fixed Windows












Outside Openable Doors with Fixed Windows












Inside & Outside Doors with Sliding Windows










Inside & Outside Openable Door's with Fixed and Casement Windows











Double Door Combination various types for Urban / Vogue / Finesse Series


Inside Openable Door's with Fixed Windows




Outside Openable Door's with Fixed Windows

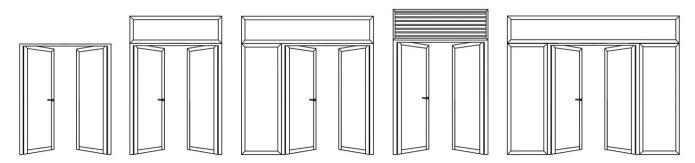

Inside & Outside Openable Door's with Fixed and Casement Windows

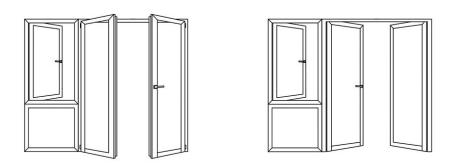


Inside & Outside Openable Door's with Casement Windows

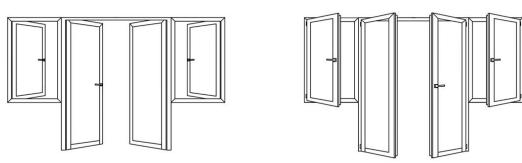






VOGUE PLUS SERIES





KEY FEATURES FOR VOGUE PLUS SERIES

- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)

Technical Specification:

Casement Window

Frame Option : Model No. Frame Width Frame Height

> VDP1 50 mm 73 mm 46 mm VDP2 80 mm VDP3 84 mm 46 mm VDP4 102 mm 46 mm

Sash Width : 1200 mm (Max.) Sash Height : 3000 mm (Max.)

: Aluminium Moveable Louvers **Door Options**

Aluminium Panel Door

Manual Honeycomb - 31 DGU Manual Venetion Blinds - 31 DGU

Please Select the color code Options given below For Honeycomb & Venetion Blinds

Locking Options : Single Point Locking

Multi Point Locking

Hinge Options : Butt Hinges

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture **PVDF**

B. Wood Coating

C. Anodizing

D. COLOR OPTIONS : Silver FOR DOOR

Light Grey Dark Grey White Off White

Beige Black Wooden

FEATURES

Combination Doors : Available Georgian Bars : Available




Aluminium Panel Door with Inside openable



Aluminium Panel Door with Outside Openable



Aluminium Fixed Movable Door with Glass Door Inside Openable

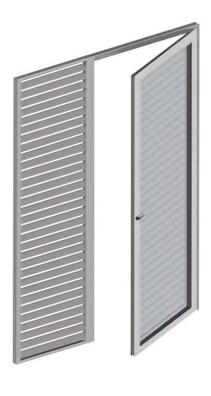

Aluminium Fixed Movable Door with Movable Door outside Openable





FINESSE SERIES DOORS

Technical Specification:-

Frame Option : Model No. Frame Width Frame Height

FD1 60 mm 61 mm

Sash Width : 1200 mm (Max.)
Sash Height : 3660 mm (Max.)

Glass Options : Single Glass - 5, 6, 8, 10 & 12 mm

Toughened Laminated Glass - 11.52,

13.52 & 17.52 mm

Double Glaze Unit Glass - 18, 24,

& 28 mm

: Manual Honeycomb - 31 DGU

Manual Venetian Blinds - 31 DGU

Automatic Honeycomb - 46 & 48 DGU

Automatic Venetian Blinds - 46 & 48 DGU

Locking Options : Single Point Locking

Multi Point Locking

Hardware

Lock Type : Normal Mortis Lock/Digital Biometric Lock

Hinge Options : Butt Hinges.

Mesh : Roll Down

Retractable Pleated Mesh

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood CoatingC. Anodizing

FEATURES

Combination Doors : Available **Georgian Bars** : Available


KEY FEATURES FOR FINESSE SERIES


- Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.
- European Quality hardware are used for all our products.
- High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light
- High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)



Outside Openable Door with Venetian Blinds

Manual and Automatic Venetian and Honeycomb Blinds

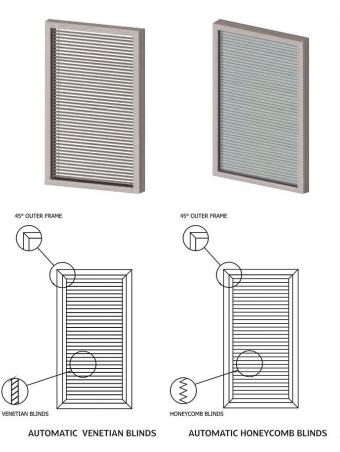

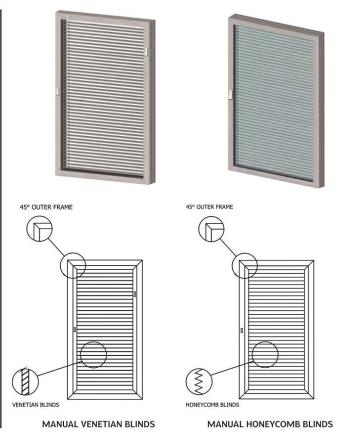





FINESSE PLUS SERIES DOORS

Technical Specification:-

Frame Option : Model No. Frame Width Frame Height

FDP1 60 mm 58 mm

Sash Width : 1200 mm (Max.)
Sash Height : 3660 mm (Max.)

Door Options : Manual Honeycomb - 31 DGU

Manual Venetian Blinds - 31 DGU Automatic Honeycomb - 46 & 48 DGU Automatic Venetian Blinds - 46 & 48 DGU

Please Select the color code Options given below

Locking Options : Single Point Locking

Multi Point Locking

Hardware

Lock Type : Digital Biometric Lock

Digital Biometric Lock with Camera

(on the inside of the door)

Door Closer : Concealed Door Closer Manual

Concealed Door Closer Automatic /

Sensor Board

Hinge Options : Hidden Hinges.

Mesh : Roll Down

Retractable Pleated Mesh

FINISHES

A. Powder Coating : Satin

Glossy Semi Glossy Matt Texture PVDF

B. Wood CoatingC. Anodizing

D. COLOR OPTIONS FOR DOOR

: Silver Light Gre

Wooden

Light Grey
Dark Grey
White
Off White
Beige
Black

FEATURES

Combination Doors : Available Georgian Bars : Available

KEY FEATURES FOR FINESSE PLUS SERIES

 Made from High quality TS6063 grade Aluminium extrusion to ensure high strength and durability with impressive and functional results.

European Quality hardware are used for all our products.


 High Quality Ethylene Propylene Diene Monomer (EPDM) Rubber is designed and developed for enhanced air, Water Resistance and longer life with UV Light

 High performance High quality glasses are used for superior air tightness, safety (Laminated Toughened Glass) and higher thermal and noise insulation (DGU)



Outside Openable Door with Honeycomb Blinds

Manual and Automatic Venetian and Honeycomb Blinds

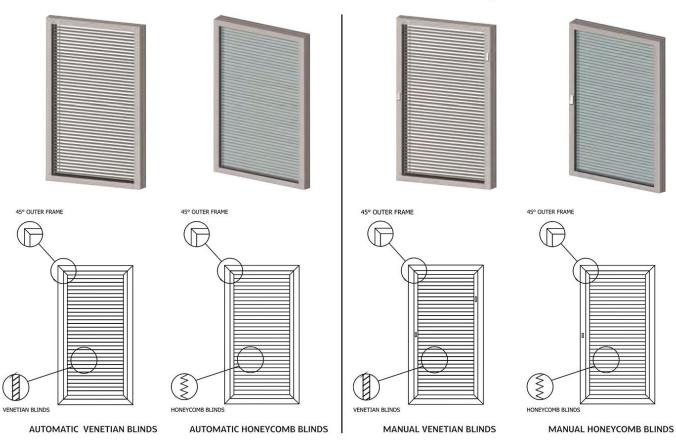


Door Combination various types


Inside Openable Door with Moveable Louvers



for Finesse, Vogue Plus & Finesse Plus Series

Outside Openable Door with Moveable Louvers

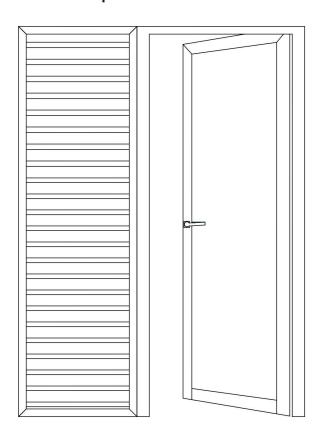

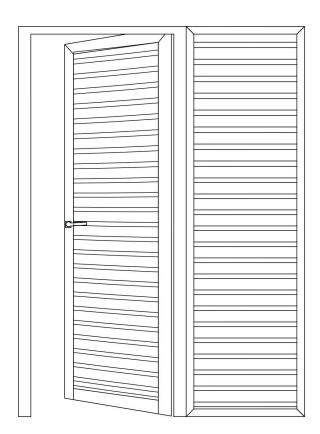



GEORGIAN BAR

Are available for :

- Luxury Series Sliding Windows
- Luxury Series Corner Windows
- Luxury Optima Series Sliding Windows
- Sophistica Series Sliding & Folding
- Glazed Series Fixed Windows
- Urban Series Top Hung,
 Casement Windows & Doors
- Vogue Series Top Hung,
 Casement Windows & Doors
- Finesse & Finesse Plus Series Doors



INVISIBLE GRILLS

Are available for following Series:

- All Series of Sliding Windows
- Sliding Doors
- All Series of Casement Windows



MOVABLE LOUVERS

Are available for following Series:

- Vogue Series Top Hung & Casement Windows
 - Vogue Plus Series Openable Doors



RAILINGS

- 1. Laminated Balcony Glass Railings
- 2. Integrated Laminated Balcony Glass Railings are Available for :
- Elegance Series Sliding Windows
- Elegance Plus Series Sliding Windows
- Luxury Series Sliding Windows
- Luxury Series Corner Windows
- Luxury Optima Series Sliding Windows



ZIP SCREEN

Are available for:

- Elegance Series Sliding Windows
- Elegance Plus Series Sliding Windows
- Luxury Series Sliding Windows
- Luxury Plus Series Sliding Windows
- Luxury Series Corner Windows
- Luxury Optima Series Sliding Windows



RETRACTBALE PLEATED MESH

Are available for:

- All Series of Sliding Windows
- All Series of Sliding Doors
- All Series of Casement Windows



MOTORIZED VENETIAN & HONEYCOMB

SKY motorized system is a system for raising lowering and tilting function for venetian blinds incorporated within 33 mm (air gap) insulating glass units. The blind is raised or lowered via a device by a DC motor manufactured by a world-class manufacturer.

(Remote control, manual wall switch panel, which allows the simultaneous operation of several blinds and tilting of the slats. The motor and the entire electronic blind system are positioned within the top rail. No other control device is visible on glass or window frames since the motor is activated through wall-mounted wire/push buttons or remote control. These state of the art systems are appealing / are aesthetically good looking with high technical endurance and performances making it suitable for a wide range of applications





SKYLIGHTS

SKY open skylights are placed in the covered opening in the roof, and the Honeycomb fabric is housed within the glass frame and suspended with reinforced stainless steel wire. These blinds can be operated either from end to end or by opening from the centre to the ends of the glass frame thickness is 46 mm motorized with a built-in receiver motor controller.

MANUAL HONEYCOMB AND VENETIAN BLINDS

SKY slider system is a manually-operated magnetic system with manual operations (raising/lowering and tilting function) for both Honeycomb and Venetian blinds incorporated within the 20mm cavity of double glazing units. It is operated by a magnetic slider handle placed on the right or left boundaries of the glass. A narrow adhesive transparent profile ensures the linear / vertical movement of the Manual Honeycomb Blinds and Manual Venetian blinds there by raising / lowering the Honeycomb Blinds and Venetian Blinds. For Manual Venetian Blinds another magnetic slider handle can be used to tilt / turn the venetian slates by slightly moving the magnetic slider up and down.

The over-travel is well controlled with pre-fixed limits for min and max positions of the movements. The slider system is particularly suited for residential / office spaces although they are not confined to its application. It ensures the insulating properties of the double glazing unit, primarily safeguarding from dirt and weather conditions. The integrated unit can be fitted into the sliding windows, Sliding Doors, Sliding Folding Doors, Top Hung systems, Doors, Office Partitions etc...like standard insulated double glass units.





Address: No, 70, 5th Cross, SSI Area, Rajajinagar, Bengaluru - 560 010 Karnataka State - INDIA Email: info@skyaluminium.in Website: www.skyaluminium.in



Your's Trusted life long Business Partner

DOOR NO 37/2238, KOLLAMKUDIMUGAL ROAD, THRIKKAKARA, ERNAKULAM, KERALA, 682021 +91 70259 36999, 70250 64999, 70250 72999 e mail: info.luxuriant@gmail.com